


Manufacturer of Power Transmission and
Motion Control Components

Precise. Reliable. Trusted.



Timing Pulley Stock
Featuring
72-Hour
Guaranteed
Shipping
Program

Ordering Information

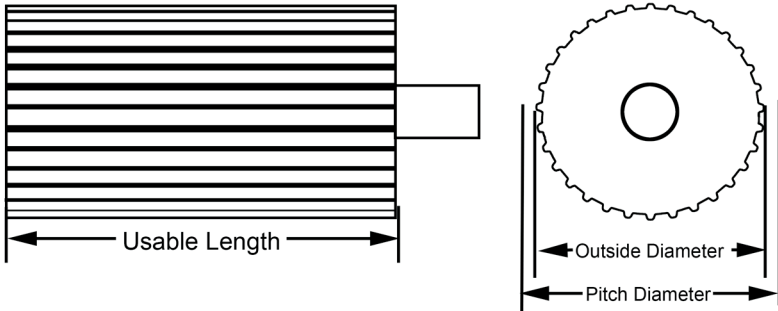

Pulley Stock Part Number Example

14 - 5M - PS - 10A

14 - Number of Teeth
5M - Pitch/Profile *See List Below*
PS - Pulley Stock
10A - Usable Length *inch/mm* Material *See List Below*

Pitches

- MXL (.080"), XL (.200"), L (.375") and H (.500") Profile
- 3M, 5M, 8M, 14M Gates HTD® Profile
- 2MR, 3MR, 5MR, 8MR Gates PGGT® Profile
- T2.5, T5, T10, T20 Profile
- AT3, AT5, AT10, AT20 Profile
- 8MX Gates Polychain®
- S3M, S5M, S8M Goodyear Super Torque PD® Profile
- 40 DP (.0816")
- ZERO BACKLASH also available

Materials

- Aluminum (A) Standard 6061
 - Steel (S) Standard 12L14
 - Stainless (Grade) SS
303SS
304SS
316SS
 - Brass B (Grade)
B360
- and all engineered polymers

72-Hour-Pulley-Stock-Program

Custom Machine and Tool Co., Inc. has been the preferred choice for pulley stock since 1964.

We GUARANTEE your pulley stock order of less than 5 pieces* will be shipped within 72 hours or we'll pay the UPS ground freight charges.

*Exclusions apply.

As a pulley manufacturer, Custom Machine and Tool Co., Inc. has an extensive inventory of stamped aluminum and steel flanges available for purchase. We also offer made to order custom flanges in aluminum, steel and stainless steel.

ORDER TODAY 800-355-5949
sales@cmtco.com
www.cmtco.com/72

40-DP (.0816") Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|------------------|---------------------|
| 10-40DP-PS-2A | 10-40DP-PS-2S | 0.260 | 0.246 | 2 | |
| 11-40DP-PS-2A | 11-40DP-PS-2S | 0.286 | 0.272 | 2 | |
| 12-40DP-PS-2A | 12-40DP-PS-2S | 0.312 | 0.298 | 2 | |
| 13-40DP-PS-2A | 13-40DP-PS-2S | 0.338 | 0.324 | 2 | |
| 14-40DP-PS-3A | 14-40DP-PS-3S | 0.364 | 0.350 | 3 | |
| 15-40DP-PS-3A | 15-40DP-PS-3S | 0.390 | 0.376 | 3 | |
| 16-40DP-PS-3A | 16-40DP-PS-3S | 0.416 | 0.402 | 3 | |
| 17-40DP-PS-3A | 17-40DP-PS-3S | 0.442 | 0.428 | 3 | |
| 18-40DP-PS-3A | 18-40DP-PS-3S | 0.468 | 0.454 | 3 | |
| 19-40DP-PS-3A | 19-40DP-PS-3S | 0.494 | 0.480 | 3 | |
| 20-40DP-PS-4A | 20-40DP-PS-4S | 0.520 | 0.506 | 4 | |
| 21-40DP-PS-4A | 21-40DP-PS-4S | 0.546 | 0.532 | 4 | |
| 22-40DP-PS-4A | 22-40DP-PS-4S | 0.572 | 0.558 | 4 | |
| 23-40DP-PS-4A | 23-40DP-PS-4S | 0.598 | 0.584 | 4 | |
| 24-40DP-PS-5A | 24-40DP-PS-5S | 0.624 | 0.610 | 5 | |
| 25-40DP-PS-5A | 25-40DP-PS-5S | 0.650 | 0.636 | 5 | |
| 26-40DP-PS-5A | 26-40DP-PS-5S | 0.676 | 0.662 | 5 | |
| 27-40DP-PS-5A | 27-40DP-PS-5S | 0.702 | 0.688 | 5 | |
| 28-40DP-PS-5A | 28-40DP-PS-5S | 0.728 | 0.714 | 5 | |
| 29-40DP-PS-5A | 29-40DP-PS-5S | 0.754 | 0.740 | 5 | |
| 30-40DP-PS-6A | 30-40DP-PS-6S | 0.780 | 0.766 | 6 | |
| 31-40DP-PS-6A | 31-40DP-PS-6S | 0.806 | 0.792 | 6 | |
| 32-40DP-PS-6A | 32-40DP-PS-6S | 0.832 | 0.818 | 6 | |
| 33-40DP-PS-6A | 33-40DP-PS-6S | 0.858 | 0.844 | 6 | |
| 34-40DP-PS-6A | 34-40DP-PS-6S | 0.884 | 0.870 | 6 | |
| 35-40DP-PS-6A | 35-40DP-PS-6S | 0.910 | 0.896 | 6 | |
| 36-40DP-PS-6A | 36-40DP-PS-6S | 0.936 | 0.922 | 6 | |
| 37-40DP-PS-6A | 37-40DP-PS-6S | 0.962 | 0.948 | 6 | |
| 38-40DP-PS-6A | 38-40DP-PS-6S | 0.988 | 0.974 | 6 | |
| 39-40DP-PS-6A | 39-40DP-PS-6S | 1.014 | 1.000 | 6 | |
| 40-40DP-PS-7A | 40-40DP-PS-7S | 1.040 | 1.026 | 7 | |
| 42-40DP-PS-7A | 42-40DP-PS-7S | 1.092 | 1.078 | 7 | |
| 44-40DP-PS-7A | 44-40DP-PS-7S | 1.144 | 1.130 | 7 | |
| 45-40DP-PS-7A | 45-40DP-PS-7S | 1.170 | 1.155 | 7 | |
| 48-40DP-PS-7A | 48-40DP-PS-7S | 1.248 | 1.234 | 7 | |
| 50-40DP-PS-7A | 50-40DP-PS-7S | 1.300 | 1.286 | 7 | |
| 51-40DP-PS-7A | 51-40DP-PS-7S | 1.326 | 1.312 | 7 | X |
| 52-40DP-PS-7A | 52-40DP-PS-7S | 1.352 | 1.338 | 7 | X |
| 54-40DP-PS-7A | 54-40DP-PS-7S | 1.404 | 1.390 | 7 | X |
| 55-40DP-PS-7A | 55-40DP-PS-7S | 1.430 | 1.416 | 7 | X |
| 56-40DP-PS-7A | 56-40DP-PS-7S | 1.456 | 1.447 | 7 | X |
| 57-40DP-PS-7A | 57-40DP-PS-7S | 1.482 | 1.468 | 7 | X |
| 60-40DP-PS-8A | 60-40DP-PS-8S | 1.560 | 1.546 | 8 | X |
| 64-40DP-PS-8A | 64-40DP-PS-8S | 1.664 | 1.650 | 8 | X |
| 65-40DP-PS-8A | 65-40DP-PS-8S | 1.690 | 1.676 | 8 | X |

Order Today
sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

40-DP (.0816") Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|------------------|---------------------|
| 66-40DP-PS-8A | 66-40DP-PS-8S | 1.716 | 1.702 | 8 | X |
| 70-40DP-PS-8A | 70-40DP-PS-8S | 1.820 | 1.806 | 8 | X |
| 72-40DP-PS-8A | 72-40DP-PS-8S | 1.872 | 1.858 | 8 | X |
| 75-40DP-PS-8A | 75-40DP-PS-8S | 1.950 | 1.936 | 8 | X |
| 80-40DP-PS-8A | 80-40DP-PS-8S | 2.080 | 2.066 | 8 | X |
| 82-40DP-PS-8A | 82-40DP-PS-8S | 2.132 | 2.118 | 8 | X |
| 84-40DP-PS-8A | 84-40DP-PS-8S | 2.184 | 2.170 | 8 | X |
| 88-40DP-PS-8A | 88-40DP-PS-8S | 2.288 | 2.274 | 8 | X |
| 90-40DP-PS-8A | 90-40DP-PS-8S | 2.340 | 2.326 | 8 | X |
| 96-40DP-PS-8A | 96-40DP-PS-8S | 2.496 | 2.482 | 8 | X |
| 98-40DP-PS-8A | 98-40DP-PS-8S | 2.548 | 2.534 | 8 | X |
| 100-40DP-PS-8A | 100-40DP-PS-8S | 2.600 | 2.586 | 8 | X |
| 102-40DP-PS-8A | 102-40DP-PS-8S | 2.652 | 2.638 | 8 | X |
| 108-40DP-PS-8A | 108-40DP-PS-8S | 2.808 | 2.794 | 8 | X |
| 110-40DP-PS-8A | 110-40DP-PS-8S | 2.860 | 2.846 | 8 | X |
| 120-40DP-PS-8A | 120-40DP-PS-8S | 3.120 | 3.106 | 8 | X |
| 130-40DP-PS-8A | 130-40DP-PS-8S | 3.380 | 3.366 | 8 | X |
| 140-40DP-PS-8A | 140-40DP-PS-8S | 3.640 | 3.626 | 8 | X |
| 150-40DP-PS-8A | 150-40DP-PS-8S | 3.900 | 3.886 | 8 | X |

Order Today
sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

MXL (.080") Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|------------------|---------------------|
| 10-MXL-PS-2A | 10-MXL-PS-2S | 0.255 | 0.235 | 2 | |
| 11-MXL-PS-2A | 11-MXL-PS-2S | 0.280 | 0.260 | 2 | |
| 12-MXL-PS-2A | 12-MXL-PS-2S | 0.306 | 0.286 | 2 | |
| 13-MXL-PS-2A | 13-MXL-PS-2S | 0.331 | 0.311 | 2 | |
| 14-MXL-PS-3A | 14-MXL-PS-3S | 0.357 | 0.337 | 3 | |
| 15-MXL-PS-3A | 15-MXL-PS-3S | 0.382 | 0.362 | 3 | |
| 16-MXL-PS-3A | 16-MXL-PS-3S | 0.407 | 0.387 | 3 | |
| 17-MXL-PS-3A | 17-MXL-PS-3S | 0.433 | 0.413 | 3 | |
| 18-MXL-PS-3A | 18-MXL-PS-3S | 0.458 | 0.438 | 3 | |
| 19-MXL-PS-3A | 19-MXL-PS-3S | 0.484 | 0.464 | 3 | |
| 20-MXL-PS-4A | 20-MXL-PS-4S | 0.509 | 0.489 | 4 | |
| 21-MXL-PS-4A | 21-MXL-PS-4S | 0.535 | 0.515 | 4 | |
| 22-MXL-PS-4A | 22-MXL-PS-4S | 0.560 | 0.540 | 4 | |
| 23-MXL-PS-4A | 23-MXL-PS-4S | 0.586 | 0.566 | 4 | |
| 24-MXL-PS-5A | 24-MXL-PS-5S | 0.611 | 0.591 | 5 | |
| 25-MXL-PS-5A | 25-MXL-PS-5S | 0.637 | 0.617 | 5 | |
| 26-MXL-PS-5A | 26-MXL-PS-5S | 0.662 | 0.642 | 5 | |
| 27-MXL-PS-5A | 27-MXL-PS-5S | 0.687 | 0.667 | 5 | |
| 28-MXL-PS-5A | 28-MXL-PS-5S | 0.713 | 0.693 | 5 | |
| 29-MXL-PS-5A | 29-MXL-PS-5S | 0.738 | 0.718 | 5 | |
| 30-MXL-PS-6A | 30-MXL-PS-6S | 0.764 | 0.744 | 6 | |
| 31-MXL-PS-6A | 31-MXL-PS-6S | 0.789 | 0.769 | 6 | |
| 32-MXL-PS-6A | 32-MXL-PS-6S | 0.815 | 0.795 | 6 | |
| 33-MXL-PS-6A | 33-MXL-PS-6S | 0.840 | 0.820 | 6 | |
| 34-MXL-PS-6A | 34-MXL-PS-6S | 0.866 | 0.846 | 6 | |
| 35-MXL-PS-6A | 35-MXL-PS-6S | 0.891 | 0.871 | 6 | |
| 36-MXL-PS-6A | 36-MXL-PS-6S | 0.917 | 0.897 | 6 | |
| 37-MXL-PS-6A | 37-MXL-PS-6S | 0.942 | 0.922 | 6 | |
| 38-MXL-PS-6A | 38-MXL-PS-6S | 0.968 | 0.948 | 6 | |
| 39-MXL-PS-6A | 39-MXL-PS-6S | 0.993 | 0.973 | 6 | |
| 40-MXL-PS-7A | 40-MXL-PS-7S | 1.019 | 0.999 | 7 | |
| 42-MXL-PS-7A | 42-MXL-PS-7S | 1.070 | 1.050 | 7 | |
| 44-MXL-PS-7A | 44-MXL-PS-7S | 1.120 | 1.100 | 7 | |
| 45-MXL-PS-7A | 45-MXL-PS-7S | 1.146 | 1.126 | 7 | |
| 48-MXL-PS-7A | 48-MXL-PS-7S | 1.222 | 1.202 | 7 | |
| 49-MXL-PS-7A | 49-MXL-PS-7S | 1.248 | 1.228 | 7 | |
| 50-MXL-PS-7A | 50-MXL-PS-7S | 1.273 | 1.253 | 7 | |
| 51-MXL-PS-7A | 51-MXL-PS-7S | 1.299 | 1.279 | 7 | |
| 52-MXL-PS-7A | 52-MXL-PS-7S | 1.324 | 1.304 | 7 | |
| 54-MXL-PS-7A | 54-MXL-PS-7S | 1.375 | 1.355 | 7 | |
| 55-MXL-PS-7A | 55-MXL-PS-7S | 1.401 | 1.381 | 7 | |
| 56-MXL-PS-7A | 56-MXL-PS-7S | 1.426 | 1.406 | 7 | |
| 57-MXL-PS-7A | 57-MXL-PS-7S | 1.451 | 1.431 | 7 | |
| 60-MXL-PS-8A | 60-MXL-PS-8S | 1.528 | 1.508 | 8 | |
| 64-MXL-PS-8A | 64-MXL-PS-8S | 1.630 | 1.610 | 8 | |

Order Today

sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

MXL (.080") Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|------------------|---------------------|
| 65-MXL-PS-8A | 65-MXL-PS-8S | 1.655 | 1.635 | 8 | |
| 66-MXL-PS-8A | 66-MXL-PS-8S | 1.681 | 1.661 | 8 | |
| 70-MXL-PS-8A | 70-MXL-PS-8S | 1.783 | 1.763 | 8 | |
| 72-MXL-PS-8A | 72-MXL-PS-8S | 1.833 | 1.813 | 8 | |
| 75-MXL-PS-8A | 75-MXL-PS-8S | 1.910 | 1.890 | 8 | |
| 80-MXL-PS-8A | 80-MXL-PS-8S | 2.037 | 2.017 | 8 | |
| 82-MXL-PS-8A | 82-MXL-PS-8S | 2.088 | 2.068 | 8 | |
| 84-MXL-PS-8A | 84-MXL-PS-8S | 2.139 | 2.119 | 8 | |
| 88-MXL-PS-8A | 88-MXL-PS-8S | 2.241 | 2.221 | 8 | |
| 90-MXL-PS-8A | 90-MXL-PS-8S | 2.292 | 2.272 | 8 | |
| 96-MXL-PS-8A | 96-MXL-PS-8S | 2.445 | 2.425 | 8 | |
| 98-MXL-PS-8A | 98-MXL-PS-8S | 2.496 | 2.476 | 8 | |
| 100-MXL-PS-8A | 100-MXL-PS-8S | 2.546 | 2.526 | 8 | |
| 102-MXL-PS-8A | 102-MXL-PS-8S | 2.597 | 2.577 | 8 | |
| 108-MXL-PS-8A | 108-MXL-PS-8S | 2.750 | 2.730 | 8 | |
| 110-MXL-PS-8A | 110-MXL-PS-8S | 2.801 | 2.781 | 8 | |
| 120-MXL-PS-8A | 120-MXL-PS-8S | 3.056 | 3.036 | 8 | |
| 130-MXL-PS-8A | 130-MXL-PS-8S | 3.310 | 3.290 | 8 | |
| 140-MXL-PS-8A | 140-MXL-PS-8S | 3.565 | 3.545 | 8 | |
| 150-MXL-PS-8A | 150-MXL-PS-8S | 3.820 | 3.800 | 8 | |

Order Today

sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

XL (.200") Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|------------------|---------------------|
| 10-XL-PS-6A | 10-XL-PS-6S | 0.637 | 0.617 | 6 | |
| 11-XL-PS-6A | 11-XL-PS-6S | 0.700 | 0.680 | 6 | |
| 12-XL-PS-8A | 12-XL-PS-8S | 0.764 | 0.744 | 8 | |
| 13-XL-PS-8A | 13-XL-PS-8S | 0.828 | 0.808 | 8 | |
| 14-XL-PS-8A | 14-XL-PS-8S | 0.891 | 0.871 | 8 | |
| 15-XL-PS-8A | 15-XL-PS-8S | 0.955 | 0.935 | 8 | |
| 16-XL-PS-8A | 16-XL-PS-8S | 1.019 | 0.999 | 8 | |
| 17-XL-PS-8A | 17-XL-PS-8S | 1.082 | 1.062 | 8 | |
| 18-XL-PS-8A | 18-XL-PS-8S | 1.146 | 1.126 | 8 | |
| 19-XL-PS-8A | 19-XL-PS-8S | 1.210 | 1.190 | 8 | |
| 20-XL-PS-8A | 20-XL-PS-8S | 1.273 | 1.253 | 8 | |
| 21-XL-PS-8A | 21-XL-PS-8S | 1.337 | 1.317 | 8 | |
| 22-XL-PS-8A | 22-XL-PS-8S | 1.401 | 1.381 | 8 | |
| 23-XL-PS-8A | 23-XL-PS-8S | 1.464 | 1.444 | 8 | |
| 24-XL-PS-8A | 24-XL-PS-8S | 1.528 | 1.508 | 8 | |
| 25-XL-PS-8A | 25-XL-PS-8S | 1.592 | 1.572 | 8 | |
| 26-XL-PS-8A | 26-XL-PS-8S | 1.655 | 1.635 | 8 | |
| 27-XL-PS-8A | 27-XL-PS-8S | 1.719 | 1.699 | 8 | |
| 28-XL-PS-8A | 28-XL-PS-8S | 1.783 | 1.763 | 8 | |
| 29-XL-PS-8A | 29-XL-PS-8S | 1.846 | 1.826 | 8 | |
| 30-XL-PS-8A | 30-XL-PS-8S | 1.910 | 1.890 | 8 | |
| 31-XL-PS-8A | 31-XL-PS-8S | 1.974 | 1.954 | 8 | |
| 32-XL-PS-8A | 32-XL-PS-8S | 2.037 | 2.017 | 8 | |
| 33-XL-PS-8A | 33-XL-PS-8S | 2.101 | 2.081 | 8 | |
| 34-XL-PS-8A | 34-XL-PS-8S | 2.165 | 2.145 | 8 | |
| 35-XL-PS-8A | 35-XL-PS-8S | 2.228 | 2.208 | 8 | |
| 36-XL-PS-8A | 36-XL-PS-8S | 2.292 | 2.272 | 8 | |
| 37-XL-PS-8A | 37-XL-PS-8S | 2.355 | 2.335 | 8 | |
| 38-XL-PS-8A | 38-XL-PS-8S | 2.419 | 2.399 | 8 | |
| 40-XL-PS-8A | 40-XL-PS-8S | 2.546 | 2.526 | 8 | |
| 42-XL-PS-8A | 42-XL-PS-8S | 2.674 | 2.654 | 8 | |
| 43-XL-PS-8A | 43-XL-PS-8S | 2.737 | 2.717 | 8 | |
| 44-XL-PS-8A | 44-XL-PS-8S | 2.801 | 2.781 | 8 | |
| 45-XL-PS-8A | 45-XL-PS-8S | 2.865 | 2.845 | 8 | |
| 48-XL-PS-8A | 48-XL-PS-8S | 3.056 | 3.036 | 8 | |
| 50-XL-PS-8A | 50-XL-PS-8S | 3.183 | 3.163 | 8 | |
| 60-XL-PS-8A | 60-XL-PS-8S | 3.820 | 3.800 | 8 | |
| 72-XL-PS-8A | 72-XL-PS-8S | 4.584 | 4.564 | 8 | X |
| 80-XL-PS-8A | 80-XL-PS-8S | 5.093 | 5.073 | 8 | X |

Order Today

sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

L (.375") Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|------------------|---------------------|
| 10-L-PS-8A | 10-L-PS-8S | 1.194 | 1.164 | 8 | |
| 11-L-PS-8A | 11-L-PS-8S | 1.313 | 1.283 | 8 | |
| 12-L-PS-8A | 12-L-PS-8S | 1.432 | 1.402 | 8 | |
| 13-L-PS-8A | 13-L-PS-8S | 1.552 | 1.522 | 8 | |
| 14-L-PS-8A | 14-L-PS-8S | 1.671 | 1.641 | 8 | |
| 15-L-PS-8A | 15-L-PS-8S | 1.790 | 1.760 | 8 | |
| 16-L-PS-8A | 16-L-PS-8S | 1.910 | 1.880 | 8 | |
| 17-L-PS-8A | 17-L-PS-8S | 2.029 | 1.999 | 8 | |
| 18-L-PS-8A | 18-L-PS-8S | 2.149 | 2.119 | 8 | |
| 19-L-PS-8A | 19-L-PS-8S | 2.268 | 2.238 | 8 | |
| 20-L-PS-8A | 20-L-PS-8S | 2.387 | 2.357 | 8 | |
| 21-L-PS-8A | 21-L-PS-8S | 2.507 | 2.477 | 8 | |
| 22-L-PS-8A | 22-L-PS-8S | 2.626 | 2.596 | 8 | |
| 23-L-PS-8A | 23-L-PS-8S | 2.745 | 2.715 | 8 | |
| 24-L-PS-8A | 24-L-PS-8S | 2.865 | 2.835 | 8 | |
| 25-L-PS-8A | 25-L-PS-8S | 2.984 | 2.954 | 8 | |
| 26-L-PS-8A | 26-L-PS-8S | 3.104 | 3.074 | 8 | |
| 27-L-PS-8A | 27-L-PS-8S | 3.223 | 3.193 | 8 | |
| 28-L-PS-8A | 28-L-PS-8S | 3.342 | 3.312 | 8 | |
| 29-L-PS-8A | 29-L-PS-8S | 3.462 | 3.432 | 8 | |
| 30-L-PS-8A | 30-L-PS-8S | 3.581 | 3.551 | 8 | |
| 32-L-PS-8A | 32-L-PS-8S | 3.820 | 3.790 | 8 | |
| 34-L-PS-8A | 34-L-PS-8S | 4.058 | 4.028 | 8 | X |
| 36-L-PS-8A | 36-L-PS-8S | 4.297 | 4.267 | 8 | X |
| 38-L-PS-8A | 38-L-PS-8S | 4.536 | 4.506 | 8 | X |
| 40-L-PS-10A | 40-L-PS-10S | 4.775 | 4.745 | 10 | X |
| 42-L-PS-10A | 42-L-PS-10S | 5.013 | 4.983 | 10 | X |
| 44-L-PS-10A | 44-L-PS-10S | 5.252 | 5.222 | 10 | X |
| 46-L-PS-10A | 46-L-PS-10S | 5.491 | 5.461 | 10 | X |
| 48-L-PS-10A | 48-L-PS-10S | 5.730 | 5.700 | 10 | X |
| 50-L-PS-10A | 50-L-PS-10S | 5.968 | 5.938 | 10 | X |
| 52-L-PS-10A | 52-L-PS-10S | 6.207 | 6.177 | 10 | X |
| 54-L-PS-10A | 54-L-PS-10S | 6.446 | 6.416 | 10 | X |
| 56-L-PS-10A | 56-L-PS-10S | 6.684 | 6.654 | 10 | X |

Order Today

sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

H (.500") Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|------------------|---------------------|
| 10-H-PS-10A | 10-H-PS-10S | 1.591 | 1.538 | 10 | |
| 11-H-PS-10A | 11-H-PS-10S | 1.750 | 1.697 | 10 | |
| 12-H-PS-10A | 12-H-PS-10S | 1.910 | 1.857 | 10 | |
| 13-H-PS-10A | 13-H-PS-10S | 2.069 | 2.016 | 10 | |
| 14-H-PS-10A | 14-H-PS-10S | 2.228 | 2.174 | 10 | |
| 15-H-PS-10A | 15-H-PS-10S | 2.387 | 2.333 | 10 | |
| 16-H-PS-10A | 16-H-PS-10S | 2.546 | 2.492 | 10 | |
| 17-H-PS-10A | 17-H-PS-10S | 2.706 | 2.652 | 10 | |
| 18-H-PS-10A | 18-H-PS-10S | 2.865 | 2.811 | 10 | |
| 19-H-PS-10A | 19-H-PS-10S | 3.024 | 2.970 | 10 | |
| 20-H-PS-10A | 20-H-PS-10S | 3.183 | 3.129 | 10 | |
| 21-H-PS-10A | 21-H-PS-10S | 3.342 | 3.288 | 10 | |
| 22-H-PS-10A | 22-H-PS-10S | 3.501 | 3.447 | 10 | |
| 23-H-PS-10A | 23-H-PS-10S | 3.661 | 3.607 | 10 | |
| 24-H-PS-10A | 24-H-PS-10S | 3.820 | 3.766 | 10 | |
| 25-H-PS-10A | 25-H-PS-10S | 3.979 | 3.925 | 10 | |
| 26-H-PS-10A | 26-H-PS-10S | 4.138 | 4.084 | 10 | X |
| 27-H-PS-10A | 27-H-PS-10S | 4.297 | 4.243 | 10 | X |
| 28-H-PS-10A | 28-H-PS-10S | 4.456 | 4.402 | 10 | X |
| 29-H-PS-10A | 29-H-PS-10S | 4.615 | 4.561 | 10 | X |
| 30-H-PS-10A | 30-H-PS-10S | 4.775 | 4.721 | 10 | X |
| 32-H-PS-10A | 32-H-PS-10S | 5.093 | 5.039 | 10 | X |
| 34-H-PS-10A | 34-H-PS-10S | 5.411 | 5.357 | 10 | X |
| 36-H-PS-10A | 36-H-PS-10S | 5.730 | 5.676 | 10 | X |
| 38-H-PS-10A | 38-H-PS-10S | 6.048 | 5.994 | 10 | X |
| 40-H-PS-10A | 40-H-PS-10S | 6.366 | 6.312 | 10 | X |
| 42-H-PS-10A | 42-H-PS-10S | 6.684 | 6.630 | 10 | X |
| 44-H-PS-10A | 44-H-PS-10S | 7.003 | 6.949 | 10 | X |
| 46-H-PS-10A | 46-H-PS-10S | 7.321 | 7.267 | 10 | X |
| 48-H-PS-10A | 48-H-PS-10S | 7.639 | 7.585 | 10 | X |

Order Today

sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

3mm HTD® Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|------------------|---------------------|
| 9-3M-PS-3A | 9-3M-PS-3S | 0.338 | 0.308 | 3 | |
| 10-3M-PS-3A | 10-3M-PS-3S | 0.376 | 0.346 | 3 | |
| 11-3M-PS-3A | 11-3M-PS-3S | 0.414 | 0.384 | 3 | |
| 12-3M-PS-4A | 12-3M-PS-4S | 0.451 | 0.421 | 4 | |
| 13-3M-PS-4A | 13-3M-PS-4S | 0.489 | 0.459 | 4 | |
| 14-3M-PS-4A | 14-3M-PS-4S | 0.526 | 0.496 | 4 | |
| 15-3M-PS-4A | 15-3M-PS-4S | 0.564 | 0.534 | 4 | |
| 16-3M-PS-5A | 16-3M-PS-5S | 0.602 | 0.572 | 5 | |
| 17-3M-PS-5A | 17-3M-PS-5S | 0.639 | 0.609 | 5 | |
| 18-3M-PS-5A | 18-3M-PS-5S | 0.677 | 0.647 | 5 | |
| 19-3M-PS-5A | 19-3M-PS-5S | 0.714 | 0.684 | 5 | |
| 20-3M-PS-6A | 20-3M-PS-6S | 0.752 | 0.722 | 6 | |
| 21-3M-PS-6A | 21-3M-PS-6S | 0.790 | 0.760 | 6 | |
| 22-3M-PS-6A | 22-3M-PS-6S | 0.827 | 0.797 | 6 | |
| 23-3M-PS-6A | 23-3M-PS-6S | 0.865 | 0.835 | 6 | |
| 24-3M-PS-6A | 24-3M-PS-6S | 0.902 | 0.872 | 6 | |
| 25-3M-PS-6A | 25-3M-PS-6S | 0.940 | 0.910 | 6 | |
| 26-3M-PS-6A | 26-3M-PS-6S | 0.977 | 0.947 | 6 | |
| 27-3M-PS-6A | 27-3M-PS-6S | 1.015 | 0.985 | 6 | |
| 28-3M-PS-6A | 28-3M-PS-6S | 1.053 | 1.023 | 6 | |
| 29-3M-PS-6A | 29-3M-PS-6S | 1.090 | 1.060 | 6 | |
| 30-3M-PS-7A | 30-3M-PS-7S | 1.128 | 1.098 | 7 | |
| 31-3M-PS-7A | 31-3M-PS-7S | 1.165 | 1.135 | 7 | |
| 32-3M-PS-7A | 32-3M-PS-7S | 1.203 | 1.173 | 7 | |
| 33-3M-PS-7A | 33-3M-PS-7S | 1.241 | 1.211 | 7 | |
| 34-3M-PS-7A | 34-3M-PS-7S | 1.278 | 1.248 | 7 | |
| 35-3M-PS-7A | 35-3M-PS-7S | 1.316 | 1.286 | 7 | |
| 36-3M-PS-8A | 36-3M-PS-8S | 1.353 | 1.323 | 8 | |
| 37-3M-PS-8A | 37-3M-PS-8S | 1.391 | 1.361 | 8 | |
| 38-3M-PS-8A | 38-3M-PS-8S | 1.429 | 1.399 | 8 | |
| 39-3M-PS-8A | 39-3M-PS-8S | 1.466 | 1.436 | 8 | |
| 40-3M-PS-8A | 40-3M-PS-8S | 1.504 | 1.474 | 8 | |
| 42-3M-PS-8A | 42-3M-PS-8S | 1.579 | 1.549 | 8 | |
| 44-3M-PS-8A | 44-3M-PS-8S | 1.654 | 1.624 | 8 | |
| 45-3M-PS-8A | 45-3M-PS-8S | 1.692 | 1.662 | 8 | |
| 48-3M-PS-8A | 48-3M-PS-8S | 1.805 | 1.775 | 8 | |
| 50-3M-PS-8A | 50-3M-PS-8S | 1.880 | 1.850 | 8 | |
| 60-3M-PS-8A | 60-3M-PS-8S | 2.256 | 2.226 | 8 | |
| 70-3M-PS-8A | 70-3M-PS-8S | 2.632 | 2.602 | 8 | |
| 80-3M-PS-8A | 80-3M-PS-8S | 3.008 | 2.978 | 8 | |
| 90-3M-PS-8A | 90-3M-PS-8S | 3.384 | 3.354 | 8 | |
| 100-3M-PS-8A | 100-3M-PS-8S | 3.760 | 3.730 | 8 | |
| 110-3M-PS-8A | 110-3M-PS-8S | 4.136 | 4.106 | 8 | X |
| 120-3M-PS-8A | 120-3M-PS-8S | 4.511 | 4.481 | 8 | X |
| 130-3M-PS-8A | 130-3M-PS-8S | 4.887 | 4.857 | 8 | X |
| 140-3M-PS-8A | 140-3M-PS-8S | 5.263 | 5.233 | 8 | X |
| 150-3M-PS-8A | 150-3M-PS-8S | 5.639 | 5.609 | 8 | X |
| 160-3M-PS-8A | 160-3M-PS-8S | 6.015 | 5.985 | 8 | X |

Order Today

sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

5mm HTD® Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|------------------|---------------------|
| 12-5M-PS-6A | 12-5M-PS-6S | 0.752 | 0.707 | 6 | |
| 13-5M-PS-6A | 13-5M-PS-6S | 0.815 | 0.770 | 6 | |
| 14-5M-PS-7A | 14-5M-PS-7S | 0.877 | 0.832 | 7 | |
| 15-5M-PS-7A | 15-5M-PS-7S | 0.940 | 0.895 | 7 | |
| 16-5M-PS-7A | 16-5M-PS-7S | 1.003 | 0.958 | 7 | |
| 17-5M-PS-7A | 17-5M-PS-7S | 1.065 | 1.020 | 7 | |
| 18-5M-PS-8A | 18-5M-PS-8S | 1.128 | 1.083 | 8 | |
| 19-5M-PS-8A | 19-5M-PS-8S | 1.191 | 1.146 | 8 | |
| 20-5M-PS-8A | 20-5M-PS-8S | 1.253 | 1.208 | 8 | |
| 21-5M-PS-8A | 21-5M-PS-8S | 1.316 | 1.271 | 8 | |
| 22-5M-PS-8A | 22-5M-PS-8S | 1.379 | 1.334 | 8 | |
| 23-5M-PS-8A | 23-5M-PS-8S | 1.441 | 1.396 | 8 | |
| 24-5M-PS-8A | 24-5M-PS-8S | 1.504 | 1.459 | 8 | |
| 25-5M-PS-8A | 25-5M-PS-8S | 1.567 | 1.522 | 8 | |
| 26-5M-PS-8A | 26-5M-PS-8S | 1.629 | 1.584 | 8 | |
| 27-5M-PS-8A | 27-5M-PS-8S | 1.692 | 1.647 | 8 | |
| 28-5M-PS-8A | 28-5M-PS-8S | 1.755 | 1.710 | 8 | |
| 29-5M-PS-8A | 29-5M-PS-8S | 1.817 | 1.772 | 8 | |
| 30-5M-PS-8A | 30-5M-PS-8S | 1.880 | 1.835 | 8 | |
| 31-5M-PS-8A | 31-5M-PS-8S | 1.943 | 1.898 | 8 | |
| 32-5M-PS-8A | 32-5M-PS-8S | 2.005 | 1.960 | 8 | |
| 33-5M-PS-8A | 33-5M-PS-8S | 2.068 | 2.023 | 8 | |
| 34-5M-PS-8A | 34-5M-PS-8S | 2.131 | 2.086 | 8 | |
| 35-5M-PS-8A | 35-5M-PS-8S | 2.193 | 2.148 | 8 | |
| 36-5M-PS-8A | 36-5M-PS-8S | 2.256 | 2.211 | 8 | |
| 38-5M-PS-8A | 38-5M-PS-8S | 2.381 | 2.336 | 8 | |
| 40-5M-PS-8A | 40-5M-PS-8S | 2.507 | 2.462 | 8 | |
| 42-5M-PS-8A | 42-5M-PS-8S | 2.632 | 2.587 | 8 | |
| 44-5M-PS-8A | 44-5M-PS-8S | 2.757 | 2.712 | 8 | |
| 45-5M-PS-8A | 45-5M-PS-8S | 2.820 | 2.775 | 8 | |
| 46-5M-PS-8A | 46-5M-PS-8S | 2.883 | 2.838 | 8 | |
| 48-5M-PS-8A | 48-5M-PS-8S | 3.008 | 2.963 | 8 | |
| 50-5M-PS-8A | 50-5M-PS-8S | 3.133 | 3.088 | 8 | |
| 54-5M-PS-8A | 54-5M-PS-8S | 3.384 | 3.339 | 8 | |
| 56-5M-PS-8A | 56-5M-PS-8S | 3.509 | 3.464 | 8 | |
| 60-5M-PS-8A | 60-5M-PS-8S | 3.760 | 3.715 | 8 | |
| 62-5M-PS-8A | 62-5M-PS-8S | 3.885 | 3.840 | 8 | |
| 65-5M-PS-8A | 65-5M-PS-8S | 4.073 | 4.028 | 8 | X |
| 72-5M-PS-8A | 72-5M-PS-8S | 4.512 | 4.467 | 8 | X |
| 80-5M-PS-8A | 80-5M-PS-8S | 5.013 | 4.968 | 8 | X |
| 90-5M-PS-8A | 90-5M-PS-8S | 5.640 | 5.595 | 8 | X |
| 100-5M-PS-8A | 100-5M-PS-8S | 6.267 | 6.222 | 8 | X |
| 112-5M-PS-8A | 112-5M-PS-8S | 7.019 | 6.974 | 8 | X |
| 126-5M-PS-8A | 126-5M-PS-8S | 7.896 | 7.851 | 8 | X |

Order Today

sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

8mm HTD® Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|------------------|---------------------|
| 20-8M-PS-10A | 20-8M-PS-10S | 2.005 | 1.951 | 10 | |
| 21-8M-PS-10A | 21-8M-PS-10S | 2.105 | 2.051 | 10 | |
| 22-8M-PS-10A | 22-8M-PS-10S | 2.206 | 2.152 | 10 | |
| 23-8M-PS-10A | 23-8M-PS-10S | 2.306 | 2.252 | 10 | |
| 24-8M-PS-10A | 24-8M-PS-10S | 2.406 | 2.352 | 10 | |
| 25-8M-PS-10A | 25-8M-PS-10S | 2.506 | 2.452 | 10 | |
| 26-8M-PS-10A | 26-8M-PS-10S | 2.607 | 2.553 | 10 | |
| 28-8M-PS-10A | 28-8M-PS-10S | 2.807 | 2.753 | 10 | |
| 30-8M-PS-10A | 30-8M-PS-10S | 3.008 | 2.954 | 10 | |
| 32-8M-PS-10A | 32-8M-PS-10S | 3.208 | 3.154 | 10 | |
| 34-8M-PS-10A | 34-8M-PS-10S | 3.409 | 3.355 | 10 | |
| 35-8M-PS-10A | 35-8M-PS-10S | 3.509 | 3.455 | 10 | |
| 36-8M-PS-10A | 36-8M-PS-10S | 3.609 | 3.555 | 10 | |
| 38-8M-PS-10A | 38-8M-PS-10S | 3.810 | 3.756 | 10 | |
| 40-8M-PS-10A | 40-8M-PS-10S | 4.010 | 3.956 | 10 | |
| 42-8M-PS-10A | 42-8M-PS-10S | 4.211 | 4.157 | 10 | X |
| 44-8M-PS-10A | 44-8M-PS-10S | 4.411 | 4.357 | 10 | X |
| 45-8M-PS-10A | 45-8M-PS-10S | 4.511 | 4.457 | 10 | X |
| 48-8M-PS-8A | 48-8M-PS-8S | 4.812 | 4.758 | 8 | X |
| 49-8M-PS-8A | 49-8M-PS-8S | 4.912 | 4.858 | 8 | X |
| 50-8M-PS-8A | 50-8M-PS-8S | 5.013 | 4.959 | 8 | X |
| 56-8M-PS-8A | 56-8M-PS-8S | 5.614 | 5.560 | 8 | X |
| 60-8M-PS-8A | 60-8M-PS-8S | 6.015 | 5.961 | 8 | X |
| 62-8M-PS-8A | 62-8M-PS-8S | 6.216 | 6.162 | 8 | X |
| 64-8M-PS-8A | 64-8M-PS-8S | 6.416 | 6.362 | 8 | X |
| 65-8M-PS-8A | 65-8M-PS-8S | 6.516 | 6.462 | 8 | X |
| 70-8M-PS-8A | 70-8M-PS-8S | 7.018 | 6.964 | 8 | X |
| 72-8M-PS-8A | 72-8M-PS-8S | 7.218 | 7.164 | 8 | X |
| 75-8M-PS-8A | 75-8M-PS-8S | 7.519 | 7.465 | 8 | X |
| 80-8M-PS-8A | 80-8M-PS-8S | 8.020 | 7.966 | 8 | X |

Order Today

sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

2mm GT® 2 Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|------------------|---------------------|
| 10-2MR-PS-2A | 10-2MR-PS-2S | 0.251 | 0.231 | 2 | |
| 11-2MR-PS-2A | 11-2MR-PS-2S | 0.276 | 0.256 | 2 | |
| 12-2MR-PS-2A | 12-2MR-PS-2S | 0.301 | 0.281 | 2 | |
| 13-2MR-PS-2A | 13-2MR-PS-2S | 0.326 | 0.306 | 2 | |
| 14-2MR-PS-3A | 14-2MR-PS-3S | 0.351 | 0.331 | 3 | |
| 15-2MR-PS-3A | 15-2MR-PS-3S | 0.376 | 0.356 | 3 | |
| 16-2MR-PS-3A | 16-2MR-PS-3S | 0.401 | 0.381 | 3 | |
| 17-2MR-PS-3A | 17-2MR-PS-3S | 0.426 | 0.406 | 3 | |
| 18-2MR-PS-3A | 18-2MR-PS-3S | 0.451 | 0.431 | 3 | |
| 19-2MR-PS-3A | 19-2MR-PS-3S | 0.476 | 0.456 | 3 | |
| 20-2MR-PS-4A | 20-2MR-PS-4S | 0.501 | 0.481 | 4 | |
| 21-2MR-PS-4A | 21-2MR-PS-4S | 0.526 | 0.506 | 4 | |
| 22-2MR-PS-4A | 22-2MR-PS-4S | 0.551 | 0.531 | 4 | |
| 23-2MR-PS-4A | 23-2MR-PS-4S | 0.577 | 0.557 | 4 | |
| 24-2MR-PS-5A | 24-2MR-PS-5S | 0.602 | 0.582 | 5 | |
| 25-2MR-PS-5A | 25-2MR-PS-5S | 0.627 | 0.607 | 5 | |
| 26-2MR-PS-5A | 26-2MR-PS-5S | 0.652 | 0.632 | 5 | |
| 27-2MR-PS-5A | 27-2MR-PS-5S | 0.677 | 0.657 | 5 | |
| 28-2MR-PS-5A | 28-2MR-PS-5S | 0.702 | 0.682 | 5 | |
| 29-2MR-PS-5A | 29-2MR-PS-5S | 0.727 | 0.707 | 5 | |
| 30-2MR-PS-6A | 30-2MR-PS-6S | 0.752 | 0.732 | 6 | |
| 31-2MR-PS-6A | 31-2MR-PS-6S | 0.777 | 0.757 | 6 | |
| 32-2MR-PS-6A | 32-2MR-PS-6S | 0.802 | 0.782 | 6 | |
| 33-2MR-PS-6A | 33-2MR-PS-6S | 0.827 | 0.807 | 6 | |
| 34-2MR-PS-6A | 34-2MR-PS-6S | 0.852 | 0.832 | 6 | |
| 35-2MR-PS-6A | 35-2MR-PS-6S | 0.877 | 0.857 | 6 | |
| 36-2MR-PS-6A | 36-2MR-PS-6S | 0.902 | 0.882 | 6 | |
| 37-2MR-PS-6A | 37-2MR-PS-6S | 0.928 | 0.908 | 6 | |
| 38-2MR-PS-6A | 38-2MR-PS-6S | 0.953 | 0.933 | 6 | |
| 39-2MR-PS-6A | 39-2MR-PS-6S | 0.978 | 0.958 | 6 | |
| 40-2MR-PS-7A | 40-2MR-PS-7S | 1.003 | 0.983 | 7 | |
| 42-2MR-PS-7A | 42-2MR-PS-7S | 1.053 | 1.033 | 7 | |
| 44-2MR-PS-7A | 44-2MR-PS-7S | 1.103 | 1.083 | 7 | |
| 45-2MR-PS-7A | 45-2MR-PS-7S | 1.128 | 1.108 | 7 | |
| 48-2MR-PS-7A | 48-2MR-PS-7S | 1.203 | 1.183 | 7 | |
| 49-2MR-PS-7A | 49-2MR-PS-7S | 1.228 | 1.208 | 7 | |
| 50-2MR-PS-7A | 50-2MR-PS-7S | 1.253 | 1.233 | 7 | |
| 51-2MR-PS-7A | 51-2MR-PS-7S | 1.278 | 1.258 | 7 | |
| 52-2MR-PS-7A | 52-2MR-PS-7S | 1.304 | 1.284 | 7 | |
| 54-2MR-PS-7A | 54-2MR-PS-7S | 1.354 | 1.334 | 7 | |
| 55-2MR-PS-7A | 55-2MR-PS-7S | 1.379 | 1.359 | 7 | |
| 56-2MR-PS-7A | 56-2MR-PS-7S | 1.404 | 1.384 | 7 | |
| 57-2MR-PS-7A | 57-2MR-PS-7S | 1.429 | 1.409 | 7 | |
| 60-2MR-PS-8A | 60-2MR-PS-8S | 1.504 | 1.484 | 8 | |
| 64-2MR-PS-8A | 64-2MR-PS-8S | 1.604 | 1.584 | 8 | |

Order Today

sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

2mm GT® 2 Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|------------------|---------------------|
| 65-2MR-PS-8A | 65-2MR-PS-8S | 1.629 | 1.609 | 8 | |
| 66-2MR-PS-8A | 66-2MR-PS-8S | 1.654 | 1.634 | 8 | |
| 70-2MR-PS-8A | 70-2MR-PS-8S | 1.755 | 1.735 | 8 | |
| 72-2MR-PS-8A | 72-2MR-PS-8S | 1.805 | 1.785 | 8 | |
| 75-2MR-PS-8A | 75-2MR-PS-8S | 1.880 | 1.860 | 8 | |
| 80-2MR-PS-8A | 80-2MR-PS-8S | 2.005 | 1.985 | 8 | |
| 82-2MR-PS-8A | 82-2MR-PS-8S | 2.056 | 2.036 | 8 | |
| 84-2MR-PS-8A | 84-2MR-PS-8S | 2.106 | 2.086 | 8 | |
| 88-2MR-PS-8A | 88-2MR-PS-8S | 2.206 | 2.186 | 8 | |
| 90-2MR-PS-8A | 90-2MR-PS-8S | 2.256 | 2.236 | 8 | |
| 96-2MR-PS-8A | 96-2MR-PS-8S | 2.407 | 2.387 | 8 | |
| 98-2MR-PS-8A | 98-2MR-PS-8S | 2.457 | 2.437 | 8 | |
| 100-2MR-PS-8A | 100-2MR-PS-8S | 2.507 | 2.487 | 8 | |
| 102-2MR-PS-8A | 102-2MR-PS-8S | 2.557 | 2.537 | 8 | |
| 108-2MR-PS-8A | 108-2MR-PS-8S | 2.707 | 2.687 | 8 | |
| 110-2MR-PS-8A | 110-2MR-PS-8S | 2.757 | 2.737 | 8 | |
| 120-2MR-PS-8A | 120-2MR-PS-8S | 3.008 | 2.988 | 8 | |
| 130-2MR-PS-8A | 130-2MR-PS-8S | 3.259 | 3.239 | 8 | |
| 140-2MR-PS-8A | 140-2MR-PS-8S | 3.510 | 3.490 | 8 | |
| 150-2MR-PS-8A | 150-2MR-PS-8S | 3.760 | 3.740 | 8 | |

Order Today

sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

3mm GT® 2 Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|------------------|---------------------|
| 9-3MR-PS-3A | 9-3MR-PS-3S | 0.338 | 0.308 | 3 | |
| 10-3MR-PS-3A | 10-3MR-PS-3S | 0.376 | 0.346 | 3 | |
| 11-3MR-PS-3A | 11-3MR-PS-3S | 0.414 | 0.384 | 3 | |
| 12-3MR-PS-4A | 12-3MR-PS-4S | 0.451 | 0.421 | 4 | |
| 13-3MR-PS-4A | 13-3MR-PS-4S | 0.489 | 0.459 | 4 | |
| 14-3MR-PS-4A | 14-3MR-PS-4S | 0.526 | 0.496 | 4 | |
| 15-3MR-PS-4A | 15-3MR-PS-4S | 0.564 | 0.534 | 4 | |
| 16-3MR-PS-5A | 16-3MR-PS-5S | 0.602 | 0.572 | 5 | |
| 17-3MR-PS-5A | 17-3MR-PS-5S | 0.639 | 0.609 | 5 | |
| 18-3MR-PS-5A | 18-3MR-PS-5S | 0.677 | 0.647 | 5 | |
| 19-3MR-PS-5A | 19-3MR-PS-5S | 0.714 | 0.684 | 5 | |
| 20-3MR-PS-6A | 20-3MR-PS-6S | 0.752 | 0.722 | 6 | |
| 21-3MR-PS-6A | 21-3MR-PS-6S | 0.790 | 0.760 | 6 | |
| 22-3MR-PS-6A | 22-3MR-PS-6S | 0.827 | 0.797 | 6 | |
| 23-3MR-PS-6A | 23-3MR-PS-6S | 0.865 | 0.835 | 6 | |
| 24-3MR-PS-6A | 24-3MR-PS-6S | 0.902 | 0.872 | 6 | |
| 25-3MR-PS-6A | 25-3MR-PS-6S | 0.940 | 0.910 | 6 | |
| 26-3MR-PS-6A | 26-3MR-PS-6S | 0.977 | 0.947 | 6 | |
| 27-3MR-PS-6A | 27-3MR-PS-6S | 1.015 | 0.985 | 6 | |
| 28-3MR-PS-6A | 28-3MR-PS-6S | 1.053 | 1.023 | 6 | |
| 29-3MR-PS-6A | 29-3MR-PS-6S | 1.090 | 1.060 | 6 | |
| 30-3MR-PS-7A | 30-3MR-PS-7S | 1.128 | 1.098 | 7 | |
| 31-3MR-PS-7A | 31-3MR-PS-7S | 1.165 | 1.135 | 7 | |
| 32-3MR-PS-7A | 32-3MR-PS-7S | 1.203 | 1.173 | 7 | |
| 33-3MR-PS-7A | 33-3MR-PS-7S | 1.241 | 1.211 | 7 | |
| 34-3MR-PS-7A | 34-3MR-PS-7S | 1.278 | 1.248 | 7 | |
| 35-3MR-PS-7A | 35-3MR-PS-7S | 1.316 | 1.286 | 7 | |
| 36-3MR-PS-8A | 36-3MR-PS-8S | 1.353 | 1.323 | 8 | |
| 37-3MR-PS-8A | 37-3MR-PS-8S | 1.391 | 1.361 | 8 | |
| 38-3MR-PS-8A | 38-3MR-PS-8S | 1.429 | 1.399 | 8 | |
| 39-3MR-PS-8A | 39-3MR-PS-8S | 1.466 | 1.436 | 8 | |
| 40-3MR-PS-8A | 40-3MR-PS-8S | 1.504 | 1.474 | 8 | |
| 42-3MR-PS-8A | 42-3MR-PS-8S | 1.579 | 1.549 | 8 | |
| 44-3MR-PS-8A | 44-3MR-PS-8S | 1.654 | 1.624 | 8 | |
| 45-3MR-PS-8A | 45-3MR-PS-8S | 1.692 | 1.662 | 8 | |
| 48-3MR-PS-8A | 48-3MR-PS-8S | 1.805 | 1.775 | 8 | |
| 50-3MR-PS-8A | 50-3MR-PS-8S | 1.880 | 1.850 | 8 | |
| 52-3MR-PS-8A | 52-3MR-PS-8S | 1.955 | 1.925 | 8 | |
| 54-3MR-PS-8A | 54-3MR-PS-8S | 2.030 | 2.000 | 8 | |
| 56-3MR-PS-8A | 56-3MR-PS-8S | 2.105 | 2.075 | 8 | |
| 60-3MR-PS-8A | 60-3MR-PS-8S | 2.256 | 2.226 | 8 | |
| 62-3MR-PS-8A | 62-3MR-PS-8S | 2.331 | 2.301 | 8 | |
| 64-3MR-PS-8A | 64-3MR-PS-8S | 2.406 | 2.376 | 8 | |
| 66-3MR-PS-8A | 66-3MR-PS-8S | 2.481 | 2.451 | 8 | |
| 68-3MR-PS-8A | 68-3MR-PS-8S | 2.557 | 2.527 | 8 | |
| 70-3MR-PS-8A | 70-3MR-PS-8S | 2.632 | 2.602 | 8 | |
| 72-3MR-PS-8A | 72-3MR-PS-8S | 2.707 | 2.677 | 8 | |

Order Today

sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

3mm GT® 2 Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|------------------|---------------------|
| 75-3MR-PS-8A | 75-3MR-PS-8S | 2.820 | 2.790 | 8 | |
| 80-3MR-PS-8A | 80-3MR-PS-8S | 3.008 | 2.978 | 8 | |
| 90-3MR-PS-8A | 90-3MR-PS-8S | 3.384 | 3.354 | 8 | |
| 100-3MR-PS-8A | 100-3MR-PS-8S | 3.760 | 3.730 | 8 | |
| 110-3MR-PS-8A | 110-3MR-PS-8S | 4.136 | 4.106 | 8 | X |
| 120-3MR-PS-8A | 120-3MR-PS-8S | 4.511 | 4.481 | 8 | X |
| 130-3MR-PS-8A | 130-3MR-PS-8S | 4.887 | 4.857 | 8 | X |
| 140-3MR-PS-8A | 140-3MR-PS-8S | 5.263 | 5.233 | 8 | X |
| 150-3MR-PS-8A | 150-3MR-PS-8S | 5.639 | 5.609 | 8 | X |
| 160-3MR-PS-8A | 160-3MR-PS-8S | 6.015 | 5.985 | 8 | X |

Order Today

sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

5mm GT® 2 Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|------------------|---------------------|
| 12-5MR-PS-6A | 12-5MR-PS-6S | 0.752 | 0.707 | 6 | |
| 13-5MR-PS-6A | 13-5MR-PS-6S | 0.815 | 0.770 | 6 | |
| 14-5MR-PS-7A | 14-5MR-PS-7S | 0.877 | 0.832 | 7 | |
| 15-5MR-PS-7A | 15-5MR-PS-7S | 0.940 | 0.895 | 7 | |
| 16-5MR-PS-7A | 16-5MR-PS-7S | 1.003 | 0.958 | 7 | |
| 17-5MR-PS-7A | 17-5MR-PS-7S | 1.065 | 1.020 | 7 | |
| 18-5MR-PS-8A | 18-5MR-PS-8S | 1.128 | 1.083 | 8 | |
| 19-5MR-PS-8A | 19-5MR-PS-8S | 1.191 | 1.146 | 8 | |
| 20-5MR-PS-8A | 20-5MR-PS-8S | 1.253 | 1.208 | 8 | |
| 21-5MR-PS-8A | 21-5MR-PS-8S | 1.316 | 1.271 | 8 | |
| 22-5MR-PS-8A | 22-5MR-PS-8S | 1.379 | 1.334 | 8 | |
| 23-5MR-PS-8A | 23-5MR-PS-8S | 1.441 | 1.396 | 8 | |
| 24-5MR-PS-8A | 24-5MR-PS-8S | 1.504 | 1.459 | 8 | |
| 25-5MR-PS-8A | 25-5MR-PS-8S | 1.567 | 1.522 | 8 | |
| 26-5MR-PS-8A | 26-5MR-PS-8S | 1.629 | 1.584 | 8 | |
| 27-5MR-PS-8A | 27-5MR-PS-8S | 1.692 | 1.647 | 8 | |
| 28-5MR-PS-8A | 28-5MR-PS-8S | 1.755 | 1.710 | 8 | |
| 29-5MR-PS-8A | 29-5MR-PS-8S | 1.817 | 1.772 | 8 | |
| 30-5MR-PS-8A | 30-5MR-PS-8S | 1.880 | 1.835 | 8 | |
| 31-5MR-PS-8A | 31-5MR-PS-8S | 1.943 | 1.898 | 8 | |
| 32-5MR-PS-8A | 32-5MR-PS-8S | 2.005 | 1.960 | 8 | |
| 33-5MR-PS-8A | 33-5MR-PS-8S | 2.068 | 2.023 | 8 | |
| 34-5MR-PS-8A | 34-5MR-PS-8S | 2.131 | 2.086 | 8 | |
| 35-5MR-PS-8A | 35-5MR-PS-8S | 2.193 | 2.148 | 8 | |
| 36-5MR-PS-8A | 36-5MR-PS-8S | 2.256 | 2.211 | 8 | |
| 38-5MR-PS-8A | 38-5MR-PS-8S | 2.381 | 2.336 | 8 | |
| 40-5MR-PS-8A | 40-5MR-PS-8S | 2.507 | 2.462 | 8 | |
| 42-5MR-PS-8A | 42-5MR-PS-8S | 2.632 | 2.587 | 8 | |
| 44-5MR-PS-8A | 44-5MR-PS-8S | 2.757 | 2.712 | 8 | |
| 45-5MR-PS-8A | 45-5MR-PS-8S | 2.820 | 2.775 | 8 | |
| 46-5MR-PS-8A | 46-5MR-PS-8S | 2.883 | 2.838 | 8 | |
| 48-5MR-PS-8A | 48-5MR-PS-8S | 3.008 | 2.963 | 8 | |
| 50-5MR-PS-8A | 50-5MR-PS-8S | 3.133 | 3.088 | 8 | |
| 54-5MR-PS-8A | 54-5MR-PS-8S | 3.384 | 3.339 | 8 | |
| 56-5MR-PS-8A | 56-5MR-PS-8S | 3.509 | 3.464 | 8 | |
| 60-5MR-PS-8A | 60-5MR-PS-8S | 3.760 | 3.715 | 8 | |
| 62-5MR-PS-8A | 62-5MR-PS-8S | 3.885 | 3.840 | 8 | |
| 65-5MR-PS-8A | 65-5MR-PS-8S | 4.073 | 4.028 | 8 | X |
| 72-5MR-PS-8A | 72-5MR-PS-8S | 4.512 | 4.467 | 8 | X |
| 80-5MR-PS-8A | 80-5MR-PS-8S | 5.013 | 4.968 | 8 | X |
| 90-5MR-PS-8A | 90-5MR-PS-8S | 5.640 | 5.595 | 8 | X |
| 100-5MR-PS-8A | 100-5MR-PS-8S | 6.267 | 6.222 | 8 | X |
| 112-5MR-PS-8A | 112-5MR-PS-8S | 7.019 | 6.974 | 8 | X |
| 126-5MR-PS-8A | 126-5MR-PS-8S | 7.896 | 7.851 | 8 | X |

Order Today
sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

8mm GT® 2 Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|------------------|---------------------|
| 20-8MR-PS-10A | 20-8MR-PS-10S | 2.005 | 1.951 | 10 | |
| 21-8MR-PS-10A | 21-8MR-PS-10S | 2.105 | 2.051 | 10 | |
| 22-8MR-PS-10A | 22-8MR-PS-10S | 2.206 | 2.152 | 10 | |
| 23-8MR-PS-10A | 23-8MR-PS-10S | 2.306 | 2.252 | 10 | |
| 24-8MR-PS-10A | 24-8MR-PS-10S | 2.406 | 2.352 | 10 | |
| 25-8MR-PS-10A | 25-8MR-PS-10S | 2.506 | 2.452 | 10 | |
| 26-8MR-PS-10A | 26-8MR-PS-10S | 2.607 | 2.553 | 10 | |
| 28-8MR-PS-10A | 28-8MR-PS-10S | 2.807 | 2.753 | 10 | |
| 30-8MR-PS-10A | 30-8MR-PS-10S | 3.008 | 2.954 | 10 | |
| 32-8MR-PS-10A | 32-8MR-PS-10S | 3.208 | 3.154 | 10 | |
| 34-8MR-PS-10A | 34-8MR-PS-10S | 3.409 | 3.355 | 10 | |
| 35-8MR-PS-10A | 35-8MR-PS-10S | 3.509 | 3.455 | 10 | |
| 36-8MR-PS-10A | 36-8MR-PS-10S | 3.609 | 3.555 | 10 | |
| 38-8MR-PS-10A | 38-8MR-PS-10S | 3.810 | 3.756 | 10 | |
| 40-8MR-PS-10A | 40-8MR-PS-10S | 4.010 | 3.956 | 10 | |
| 42-8MR-PS-10A | 42-8MR-PS-10S | 4.211 | 4.157 | 10 | X |
| 44-8MR-PS-10A | 44-8MR-PS-10S | 4.411 | 4.357 | 10 | X |
| 45-8MR-PS-10A | 45-8MR-PS-10S | 4.511 | 4.457 | 10 | X |
| 48-8MR-PS-8A | 48-8MR-PS-8S | 4.812 | 4.758 | 8 | X |
| 49-8MR-PS-8A | 49-8MR-PS-8S | 4.912 | 4.858 | 8 | X |
| 50-8MR-PS-8A | 50-8MR-PS-8S | 5.013 | 4.959 | 8 | X |
| 56-8MR-PS-8A | 56-8MR-PS-8S | 5.614 | 5.560 | 8 | X |
| 60-8MR-PS-8A | 60-8MR-PS-8S | 6.015 | 5.961 | 8 | X |
| 62-8MR-PS-8A | 62-8MR-PS-8S | 6.216 | 6.162 | 8 | X |
| 64-8MR-PS-8A | 64-8MR-PS-8S | 6.416 | 6.362 | 8 | X |
| 65-8MR-PS-8A | 65-8MR-PS-8S | 6.516 | 6.462 | 8 | X |
| 70-8MR-PS-8A | 70-8MR-PS-8S | 7.018 | 6.964 | 8 | X |
| 72-8MR-PS-8A | 72-8MR-PS-8S | 7.218 | 7.164 | 8 | X |
| 75-8MR-PS-8A | 75-8MR-PS-8S | 7.519 | 7.465 | 8 | X |
| 80-8MR-PS-8A | 80-8MR-PS-8S | 8.020 | 7.966 | 8 | X |

Order Today

sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

T2.5 Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length(mm) | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|----------------------|---------------------|
| 10-T2.5-PS-50A | 10-T2.5-PS-50S | 0.317 | 0.293 | 50 | |
| 12-T2.5-PS-50A | 12-T2.5-PS-50S | 0.378 | 0.354 | 50 | |
| 13-T2.5-PS-50A | 13-T2.5-PS-50S | 0.409 | 0.386 | 50 | |
| 14-T2.5-PS-50A | 14-T2.5-PS-50S | 0.441 | 0.417 | 50 | |
| 15-T2.5-PS-50A | 15-T2.5-PS-50S | 0.472 | 0.449 | 50 | |
| 16-T2.5-PS-50A | 16-T2.5-PS-50S | 0.504 | 0.480 | 50 | |
| 17-T2.5-PS-50A | 17-T2.5-PS-50S | 0.535 | 0.512 | 50 | |
| 18-T2.5-PS-50A | 18-T2.5-PS-50S | 0.567 | 0.543 | 50 | |
| 19-T2.5-PS-90A | 19-T2.5-PS-90S | 0.598 | 0.575 | 90 | |
| 20-T2.5-PS-90A | 20-T2.5-PS-90S | 0.630 | 0.606 | 90 | |
| 21-T2.5-PS-90A | 21-T2.5-PS-90S | 0.661 | 0.638 | 90 | |
| 22-T2.5-PS-125A | 22-T2.5-PS-125S | 0.693 | 0.669 | 125 | |
| 24-T2.5-PS-125A | 24-T2.5-PS-125S | 0.754 | 0.730 | 125 | |
| 26-T2.5-PS-125A | 26-T2.5-PS-125S | 0.817 | 0.793 | 125 | |
| 27-T2.5-PS-125A | 27-T2.5-PS-125S | 0.848 | 0.825 | 125 | |
| 28-T2.5-PS-125A | 28-T2.5-PS-125S | 0.880 | 0.857 | 125 | |
| 29-T2.5-PS-125A | 29-T2.5-PS-125S | 0.911 | 0.888 | 125 | |
| 30-T2.5-PS-125A | 30-T2.5-PS-125S | 0.943 | 0.919 | 125 | |
| 32-T2.5-PS-125A | 32-T2.5-PS-125S | 1.006 | 0.982 | 125 | |
| 34-T2.5-PS-125A | 34-T2.5-PS-125S | 1.069 | 1.045 | 125 | |
| 35-T2.5-PS-132A | 35-T2.5-PS-132S | 1.100 | 1.077 | 132 | |
| 36-T2.5-PS-132A | 36-T2.5-PS-132S | 1.132 | 1.108 | 132 | |
| 38-T2.5-PS-132A | 38-T2.5-PS-132S | 1.193 | 1.169 | 132 | |
| 40-T2.5-PS-132A | 40-T2.5-PS-132S | 1.256 | 1.232 | 132 | |
| 42-T2.5-PS-132A | 42-T2.5-PS-132S | 1.319 | 1.295 | 132 | |
| 44-T2.5-PS-132A | 44-T2.5-PS-132S | 1.382 | 1.358 | 132 | |
| 45-T2.5-PS-132A | 45-T2.5-PS-132S | 1.413 | 1.390 | 132 | |
| 48-T2.5-PS-132A | 48-T2.5-PS-132S | 1.508 | 1.484 | 132 | |
| 50-T2.5-PS-160A | 50-T2.5-PS-160S | 1.569 | 1.545 | 160 | |
| 60-T2.5-PS-160A | 60-T2.5-PS-160S | 1.884 | 1.860 | 160 | |
| 65-T2.5-PS-160A | 65-T2.5-PS-160S | 2.039 | 2.016 | 160 | |
| 70-T2.5-PS-160A | 70-T2.5-PS-160S | 2.197 | 2.173 | 160 | |
| 72-T2.5-PS-160A | 72-T2.5-PS-160S | 2.260 | 2.236 | 160 | |
| 90-T2.5-PS-160A | 90-T2.5-PS-160S | 2.824 | 2.800 | 160 | |
| 100-T2.5-PS-160A | 100-T2.5-PS-160S | 3.137 | 3.113 | 160 | |

Order Today

sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

T5 Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length(mm) | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|----------------------|---------------------|
| 10-T5-PS-125A | 10-T5-PS-125S | 0.632 | 0.593 | 125 | |
| 11-T5-PS-125A | 11-T5-PS-125S | 0.695 | 0.656 | 125 | |
| 12-T5-PS-125A | 12-T5-PS-125S | 0.758 | 0.719 | 125 | |
| 13-T5-PS-125A | 13-T5-PS-125S | 0.821 | 0.781 | 125 | |
| 14-T5-PS-132A | 14-T5-PS-132S | 0.884 | 0.844 | 132 | |
| 15-T5-PS-132A | 15-T5-PS-132S | 0.947 | 0.907 | 132 | |
| 16-T5-PS-140A | 16-T5-PS-140S | 1.008 | 0.969 | 140 | |
| 17-T5-PS-140A | 17-T5-PS-140S | 1.071 | 1.031 | 140 | |
| 18-T5-PS-140A | 18-T5-PS-140S | 1.134 | 1.094 | 140 | |
| 19-T5-PS-140A | 19-T5-PS-140S | 1.197 | 1.157 | 140 | |
| 20-T5-PS-160A | 20-T5-PS-160S | 1.260 | 1.220 | 160 | |
| 21-T5-PS-160A | 21-T5-PS-160S | 1.327 | 1.287 | 160 | |
| 22-T5-PS-160A | 22-T5-PS-160S | 1.388 | 1.348 | 160 | |
| 23-T5-PS-160A | 23-T5-PS-160S | 1.451 | 1.411 | 160 | |
| 24-T5-PS-160A | 24-T5-PS-160S | 1.512 | 1.472 | 160 | |
| 25-T5-PS-160A | 25-T5-PS-160S | 1.575 | 1.535 | 160 | |
| 26-T5-PS-160A | 26-T5-PS-160S | 1.638 | 1.598 | 160 | |
| 27-T5-PS-160A | 27-T5-PS-160S | 1.701 | 1.661 | 160 | |
| 28-T5-PS-160A | 28-T5-PS-160S | 1.762 | 1.722 | 160 | |
| 29-T5-PS-160A | 29-T5-PS-160S | 1.825 | 1.785 | 160 | |
| 30-T5-PS-160A | 30-T5-PS-160S | 1.888 | 1.848 | 160 | |
| 32-T5-PS-160A | 32-T5-PS-160S | 2.012 | 1.972 | 160 | |
| 34-T5-PS-160A | 34-T5-PS-160S | 2.136 | 2.096 | 160 | |
| 35-T5-PS-160A | 35-T5-PS-160S | 2.199 | 2.159 | 160 | |
| 36-T5-PS-160A | 36-T5-PS-160S | 2.262 | 2.222 | 160 | |
| 37-T5-PS-160A | 37-T5-PS-160S | 2.325 | 2.285 | 160 | |
| 38-T5-PS-160A | 38-T5-PS-160S | 2.388 | 2.348 | 160 | |
| 40-T5-PS-160A | 40-T5-PS-160S | 2.514 | 2.474 | 160 | |
| 42-T5-PS-160A | 42-T5-PS-160S | 2.638 | 2.598 | 160 | |
| 44-T5-PS-160A | 44-T5-PS-160S | 2.764 | 2.724 | 160 | |
| 45-T5-PS-160A | 45-T5-PS-160S | 2.827 | 2.787 | 160 | |
| 46-T5-PS-160A | 46-T5-PS-160S | 2.890 | 2.850 | 160 | |
| 48-T5-PS-160A | 48-T5-PS-160S | 3.014 | 2.974 | 160 | |
| 50-T5-PS-160A | 50-T5-PS-160S | 3.140 | 3.100 | 160 | |
| 60-T5-PS-160A | 60-T5-PS-160S | 3.766 | 3.726 | 160 | |
| 72-T5-PS-160A | 72-T5-PS-160S | 4.518 | 4.478 | 160 | X |
| 80-T5-PS-160A | 80-T5-PS-160S | 5.019 | 4.980 | 160 | X |
| 90-T5-PS-160A | 90-T5-PS-160S | 5.646 | 5.606 | 160 | X |
| 100-T5-PS-160A | 100-T5-PS-160S | 6.272 | 6.233 | 160 | X |

Order Today
sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

T10 Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length(mm) | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|----------------------|---------------------|
| 10-T10-PS-140A | 10-T10-PS-140S | 1.259 | 1.180 | 140 | |
| 11-T10-PS-140A | 11-T10-PS-140S | 1.384 | 1.306 | 140 | |
| 12-T10-PS-140A | 12-T10-PS-140S | 1.510 | 1.431 | 140 | |
| 13-T10-PS-140A | 13-T10-PS-140S | 1.634 | 1.555 | 140 | |
| 14-T10-PS-160A | 14-T10-PS-160S | 1.760 | 1.681 | 160 | |
| 15-T10-PS-160A | 15-T10-PS-160S | 1.886 | 1.807 | 160 | |
| 16-T10-PS-160A | 16-T10-PS-160S | 2.010 | 1.931 | 160 | |
| 17-T10-PS-160A | 17-T10-PS-160S | 2.136 | 2.057 | 160 | |
| 18-T10-PS-160A | 18-T10-PS-160S | 2.262 | 2.183 | 160 | |
| 19-T10-PS-160A | 19-T10-PS-160S | 2.386 | 2.307 | 160 | |
| 20-T10-PS-160A | 20-T10-PS-160S | 2.512 | 2.433 | 160 | |
| 21-T10-PS-160A | 21-T10-PS-160S | 2.638 | 2.559 | 160 | |
| 22-T10-PS-160A | 22-T10-PS-160S | 2.762 | 2.683 | 160 | |
| 23-T10-PS-160A | 23-T10-PS-160S | 2.888 | 2.809 | 160 | |
| 24-T10-PS-160A | 24-T10-PS-160S | 3.014 | 2.935 | 160 | |
| 25-T10-PS-160A | 25-T10-PS-160S | 3.138 | 3.059 | 160 | |
| 26-T10-PS-160A | 26-T10-PS-160S | 3.264 | 3.185 | 160 | |
| 27-T10-PS-160A | 27-T10-PS-160S | 3.390 | 3.311 | 160 | |
| 28-T10-PS-160A | 28-T10-PS-160S | 3.514 | 3.435 | 160 | |
| 29-T10-PS-160A | 29-T10-PS-160S | 3.640 | 3.561 | 160 | |
| 30-T10-PS-160A | 30-T10-PS-160S | 3.766 | 3.687 | 160 | |
| 32-T10-PS-160A | 32-T10-PS-160S | 4.016 | 3.937 | 160 | |
| 34-T10-PS-160A | 34-T10-PS-160S | 4.268 | 4.189 | 160 | X |
| 35-T10-PS-160A | 35-T10-PS-160S | 4.392 | 4.313 | 160 | X |
| 36-T10-PS-160A | 36-T10-PS-160S | 4.518 | 4.439 | 160 | X |
| 37-T10-PS-160A | 37-T10-PS-160S | 4.642 | 4.563 | 160 | X |
| 38-T10-PS-160A | 38-T10-PS-160S | 4.768 | 4.689 | 160 | X |
| 40-T10-PS-160A | 40-T10-PS-160S | 5.018 | 4.939 | 160 | X |
| 42-T10-PS-160A | 42-T10-PS-160S | 5.270 | 5.191 | 160 | X |
| 44-T10-PS-160A | 44-T10-PS-160S | 5.520 | 5.441 | 160 | X |
| 45-T10-PS-160A | 45-T10-PS-160S | 5.646 | 5.567 | 160 | X |
| 46-T10-PS-160A | 46-T10-PS-160S | 5.770 | 5.691 | 160 | X |
| 48-T10-PS-160A | 48-T10-PS-160S | 6.022 | 5.943 | 160 | X |
| 50-T10-PS-160A | 50-T10-PS-160S | 6.272 | 6.193 | 160 | X |
| 60-T10-PS-160A | 60-T10-PS-160S | 7.524 | 7.445 | 160 | X |
| 72-T10-PS-160A | 72-T10-PS-160S | 9.027 | 8.943 | 160 | X |

Order Today
sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

AT3 Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length(mm) | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|----------------------|---------------------|
| 10-AT3-PS-50A | 10-AT3-PS-50S | 0.376 | 0.360 | 50 | |
| 12-AT3-PS-50A | 12-AT3-PS-50S | 0.451 | 0.435 | 50 | |
| 13-AT3-PS-50A | 13-AT3-PS-50S | 0.489 | 0.473 | 50 | |
| 14-AT3-PS-50A | 14-AT3-PS-50S | 0.526 | 0.510 | 50 | |
| 15-AT3-PS-50A | 15-AT3-PS-50S | 0.564 | 0.548 | 50 | |
| 16-AT3-PS-50A | 16-AT3-PS-50S | 0.602 | 0.585 | 50 | |
| 17-AT3-PS-50A | 17-AT3-PS-50S | 0.639 | 0.623 | 50 | |
| 18-AT3-PS-50A | 18-AT3-PS-50S | 0.677 | 0.661 | 50 | |
| 19-AT3-PS-90A | 19-AT3-PS-90S | 0.714 | 0.698 | 90 | |
| 20-AT3-PS-90A | 20-AT3-PS-90S | 0.752 | 0.736 | 90 | |
| 21-AT3-PS-90A | 21-AT3-PS-90S | 0.790 | 0.773 | 90 | |
| 22-AT3-PS-125A | 22-AT3-PS-125S | 0.827 | 0.811 | 125 | |
| 24-AT3-PS-125A | 24-AT3-PS-125S | 0.902 | 0.886 | 125 | |
| 26-AT3-PS-125A | 26-AT3-PS-125S | 0.978 | 0.961 | 125 | |
| 27-AT3-PS-125A | 27-AT3-PS-125S | 1.015 | 0.999 | 125 | |
| 28-AT3-PS-125A | 28-AT3-PS-125S | 1.053 | 1.037 | 125 | |
| 29-AT3-PS-125A | 29-AT3-PS-125S | 1.090 | 1.074 | 125 | |
| 30-AT3-PS-125A | 30-AT3-PS-125S | 1.128 | 1.112 | 125 | |
| 32-AT3-PS-125A | 32-AT3-PS-125S | 1.203 | 1.187 | 125 | |
| 34-AT3-PS-125A | 34-AT3-PS-125S | 1.278 | 1.262 | 125 | |
| 35-AT3-PS-132A | 35-AT3-PS-132S | 1.316 | 1.300 | 132 | |
| 36-AT3-PS-132A | 36-AT3-PS-132S | 1.353 | 1.337 | 132 | |
| 38-AT3-PS-132A | 38-AT3-PS-132S | 1.429 | 1.413 | 132 | |
| 40-AT3-PS-132A | 40-AT3-PS-132S | 1.504 | 1.488 | 132 | |
| 42-AT3-PS-132A | 42-AT3-PS-132S | 1.579 | 1.563 | 132 | |
| 44-AT3-PS-132A | 44-AT3-PS-132S | 1.654 | 1.638 | 132 | |
| 45-AT3-PS-132A | 45-AT3-PS-132S | 1.692 | 1.676 | 132 | |
| 48-AT3-PS-132A | 48-AT3-PS-132S | 1.805 | 1.788 | 132 | |
| 50-AT3-PS-160A | 50-AT3-PS-160S | 1.880 | 1.864 | 160 | |
| 60-AT3-PS-160A | 60-AT3-PS-160S | 2.256 | 2.240 | 160 | |
| 65-AT3-PS-160A | 65-AT3-PS-160S | 2.444 | 2.428 | 160 | |
| 70-AT3-PS-160A | 70-AT3-PS-160S | 2.632 | 2.616 | 160 | |
| 72-AT3-PS-160A | 72-AT3-PS-160S | 2.707 | 2.691 | 160 | |
| 90-AT3-PS-160A | 90-AT3-PS-160S | 3.384 | 3.368 | 160 | |
| 100-AT3-PS-160A | 100-AT3-PS-160S | 3.760 | 3.744 | 160 | |

Order Today

sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

AT5 Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length(mm) | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|----------------------|---------------------|
| 10-AT5-PS-125A | 10-AT5-PS-125S | 0.626 | 0.577 | 125 | |
| 11-AT5-PS-125A | 11-AT5-PS-125S | 0.689 | 0.640 | 125 | |
| 12-AT5-PS-125A | 12-AT5-PS-125S | 0.752 | 0.703 | 125 | |
| 13-AT5-PS-125A | 13-AT5-PS-125S | 0.815 | 0.766 | 125 | |
| 14-AT5-PS-132A | 14-AT5-PS-132S | 0.878 | 0.829 | 132 | |
| 15-AT5-PS-132A | 15-AT5-PS-132S | 0.941 | 0.892 | 132 | |
| 16-AT5-PS-140A | 16-AT5-PS-140S | 1.002 | 0.953 | 140 | |
| 17-AT5-PS-140A | 17-AT5-PS-140S | 1.065 | 1.016 | 140 | |
| 18-AT5-PS-140A | 18-AT5-PS-140S | 1.128 | 1.079 | 140 | |
| 19-AT5-PS-140A | 19-AT5-PS-140S | 1.191 | 1.142 | 140 | |
| 20-AT5-PS-160A | 20-AT5-PS-160S | 1.254 | 1.205 | 160 | |
| 21-AT5-PS-160A | 21-AT5-PS-160S | 1.321 | 1.272 | 160 | |
| 22-AT5-PS-160A | 22-AT5-PS-160S | 1.382 | 1.333 | 160 | |
| 23-AT5-PS-160A | 23-AT5-PS-160S | 1.563 | 1.514 | 160 | |
| 24-AT5-PS-160A | 24-AT5-PS-160S | 1.506 | 1.457 | 160 | |
| 25-AT5-PS-160A | 25-AT5-PS-160S | 1.569 | 1.520 | 160 | |
| 26-AT5-PS-160A | 26-AT5-PS-160S | 1.632 | 1.583 | 160 | |
| 27-AT5-PS-160A | 27-AT5-PS-160S | 1.695 | 1.646 | 160 | |
| 28-AT5-PS-160A | 28-AT5-PS-160S | 1.756 | 1.707 | 160 | |
| 29-AT5-PS-160A | 29-AT5-PS-160S | 1.819 | 1.770 | 160 | |
| 30-AT5-PS-160A | 30-AT5-PS-160S | 1.882 | 1.833 | 160 | |
| 32-AT5-PS-160A | 32-AT5-PS-160S | 2.006 | 1.957 | 160 | |
| 34-AT5-PS-160A | 34-AT5-PS-160S | 2.130 | 2.081 | 160 | |
| 35-AT5-PS-160A | 35-AT5-PS-160S | 2.193 | 2.144 | 160 | |
| 36-AT5-PS-160A | 36-AT5-PS-160S | 2.256 | 2.207 | 160 | |
| 37-AT5-PS-160A | 37-AT5-PS-160S | 2.319 | 2.270 | 160 | |
| 38-AT5-PS-160A | 38-AT5-PS-160S | 2.382 | 2.333 | 160 | |
| 40-AT5-PS-160A | 40-AT5-PS-160S | 2.508 | 2.459 | 160 | |
| 42-AT5-PS-160A | 42-AT5-PS-160S | 2.632 | 2.583 | 160 | |
| 44-AT5-PS-160A | 44-AT5-PS-160S | 2.758 | 2.709 | 160 | |
| 45-AT5-PS-160A | 45-AT5-PS-160S | 2.821 | 2.772 | 160 | |
| 46-AT5-PS-160A | 46-AT5-PS-160S | 2.884 | 2.835 | 160 | |
| 48-AT5-PS-160A | 48-AT5-PS-160S | 3.008 | 2.959 | 160 | |
| 50-AT5-PS-160A | 50-AT5-PS-160S | 3.134 | 3.085 | 160 | |
| 60-AT5-PS-160A | 60-AT5-PS-160S | 3.760 | 3.711 | 160 | |
| 72-AT5-PS-160A | 72-AT5-PS-160S | 4.512 | 4.463 | 160 | X |
| 80-AT5-PS-160A | 80-AT5-PS-160S | 5.014 | 4.965 | 160 | X |
| 90-AT5-PS-160A | 90-AT5-PS-160S | 5.642 | 5.593 | 160 | X |
| 100-AT5-PS-160A | 100-AT5-PS-160S | 6.268 | 6.219 | 160 | X |

Order Today

sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

AT10 Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length(mm) | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|----------------------|---------------------|
| 12-AT10-PS-140A | 12-AT10-PS-140S | 1.502 | 1.431 | 140 | |
| 13-AT10-PS-140A | 13-AT10-PS-140S | 1.626 | 1.555 | 140 | |
| 14-AT10-PS-160A | 14-AT10-PS-160S | 1.752 | 1.681 | 160 | |
| 15-AT10-PS-160A | 15-AT10-PS-160S | 1.878 | 1.807 | 160 | |
| 16-AT10-PS-160A | 16-AT10-PS-160S | 2.002 | 1.931 | 160 | |
| 17-AT10-PS-160A | 17-AT10-PS-160S | 2.128 | 2.057 | 160 | |
| 18-AT10-PS-160A | 18-AT10-PS-160S | 2.254 | 2.183 | 160 | |
| 19-AT10-PS-160A | 19-AT10-PS-160S | 2.378 | 2.307 | 160 | |
| 20-AT10-PS-160A | 20-AT10-PS-160S | 2.504 | 2.433 | 160 | |
| 21-AT10-PS-160A | 21-AT10-PS-160S | 2.630 | 2.559 | 160 | |
| 22-AT10-PS-160A | 22-AT10-PS-160S | 2.754 | 2.683 | 160 | |
| 23-AT10-PS-160A | 23-AT10-PS-160S | 2.880 | 2.809 | 160 | |
| 24-AT10-PS-160A | 24-AT10-PS-160S | 3.006 | 2.935 | 160 | |
| 25-AT10-PS-160A | 25-AT10-PS-160S | 3.130 | 3.059 | 160 | |
| 26-AT10-PS-160A | 26-AT10-PS-160S | 3.256 | 3.185 | 160 | |
| 27-AT10-PS-160A | 27-AT10-PS-160S | 3.382 | 3.311 | 160 | |
| 28-AT10-PS-160A | 28-AT10-PS-160S | 3.506 | 3.435 | 160 | |
| 29-AT10-PS-160A | 29-AT10-PS-160S | 3.632 | 3.561 | 160 | |
| 30-AT10-PS-160A | 30-AT10-PS-160S | 3.758 | 3.687 | 160 | |
| 32-AT10-PS-160A | 32-AT10-PS-160S | 4.008 | 3.937 | 160 | |
| 34-AT10-PS-160A | 34-AT10-PS-160S | 4.260 | 4.189 | 160 | X |
| 35-AT10-PS-160A | 35-AT10-PS-160S | 4.384 | 4.313 | 160 | X |
| 36-AT10-PS-160A | 36-AT10-PS-160S | 4.510 | 4.439 | 160 | X |
| 37-AT10-PS-160A | 37-AT10-PS-160S | 4.634 | 4.563 | 160 | X |
| 38-AT10-PS-160A | 38-AT10-PS-160S | 4.760 | 4.689 | 160 | X |
| 40-AT10-PS-160A | 40-AT10-PS-160S | 5.010 | 4.939 | 160 | X |
| 42-AT10-PS-160A | 42-AT10-PS-160S | 5.262 | 5.191 | 160 | X |
| 44-AT10-PS-160A | 44-AT10-PS-160S | 5.512 | 5.441 | 160 | X |
| 45-AT10-PS-160A | 45-AT10-PS-160S | 5.638 | 5.567 | 160 | X |
| 46-AT10-PS-160A | 46-AT10-PS-160S | 5.762 | 5.691 | 160 | X |
| 48-AT10-PS-160A | 48-AT10-PS-160S | 6.014 | 5.943 | 160 | X |
| 50-AT10-PS-160A | 50-AT10-PS-160S | 6.264 | 6.193 | 160 | X |
| 60-AT10-PS-160A | 60-AT10-PS-160S | 7.516 | 7.445 | 160 | X |
| 72-AT10-PS-160A | 72-AT10-PS-160S | 9.014 | 8.943 | 160 | X |

Order Today

sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

3mm SuperTorquePD® Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|------------------|---------------------|
| 9-S3M-PS-3A | 9-S3M-PS-3S | 0.338 | 0.308 | 3 | |
| 10-S3M-PS-3A | 10-S3M-PS-3S | 0.376 | 0.346 | 3 | |
| 11-S3M-PS-3A | 11-S3M-PS-3S | 0.414 | 0.384 | 3 | |
| 12-S3M-PS-4A | 12-S3M-PS-4S | 0.451 | 0.421 | 4 | |
| 13-S3M-PS-4A | 13-S3M-PS-4S | 0.489 | 0.459 | 4 | |
| 14-S3M-PS-4A | 14-S3M-PS-4S | 0.526 | 0.496 | 4 | |
| 15-S3M-PS-4A | 15-S3M-PS-4S | 0.564 | 0.534 | 4 | |
| 16-S3M-PS-5A | 16-S3M-PS-5S | 0.602 | 0.572 | 5 | |
| 17-S3M-PS-5A | 17-S3M-PS-5S | 0.639 | 0.609 | 5 | |
| 18-S3M-PS-5A | 18-S3M-PS-5S | 0.677 | 0.647 | 5 | |
| 19-S3M-PS-5A | 19-S3M-PS-5S | 0.714 | 0.684 | 5 | |
| 20-S3M-PS-6A | 20-S3M-PS-6S | 0.752 | 0.722 | 6 | |
| 21-S3M-PS-6A | 21-S3M-PS-6S | 0.790 | 0.760 | 6 | |
| 22-S3M-PS-6A | 22-S3M-PS-6S | 0.827 | 0.797 | 6 | |
| 23-S3M-PS-6A | 23-S3M-PS-6S | 0.865 | 0.835 | 6 | |
| 24-S3M-PS-6A | 24-S3M-PS-6S | 0.902 | 0.872 | 6 | |
| 25-S3M-PS-6A | 25-S3M-PS-6S | 0.940 | 0.910 | 6 | |
| 26-S3M-PS-6A | 26-S3M-PS-6S | 0.977 | 0.947 | 6 | |
| 27-S3M-PS-6A | 27-S3M-PS-6S | 1.015 | 0.985 | 6 | |
| 28-S3M-PS-6A | 28-S3M-PS-6S | 1.053 | 1.023 | 6 | |
| 29-S3M-PS-6A | 29-S3M-PS-6S | 1.090 | 1.060 | 6 | |
| 30-S3M-PS-7A | 30-S3M-PS-7S | 1.128 | 1.098 | 7 | |
| 31-S3M-PS-7A | 31-S3M-PS-7S | 1.165 | 1.135 | 7 | |
| 32-S3M-PS-7A | 32-S3M-PS-7S | 1.203 | 1.173 | 7 | |
| 33-S3M-PS-7A | 33-S3M-PS-7S | 1.241 | 1.211 | 7 | |
| 34-S3M-PS-7A | 34-S3M-PS-7S | 1.278 | 1.248 | 7 | |
| 35-S3M-PS-7A | 35-S3M-PS-7S | 1.316 | 1.286 | 7 | |
| 36-S3M-PS-8A | 36-S3M-PS-8S | 1.353 | 1.323 | 8 | |
| 37-S3M-PS-8A | 37-S3M-PS-8S | 1.391 | 1.361 | 8 | |
| 38-S3M-PS-8A | 38-S3M-PS-8S | 1.429 | 1.399 | 8 | |
| 39-S3M-PS-8A | 39-S3M-PS-8S | 1.466 | 1.436 | 8 | |
| 40-S3M-PS-8A | 40-S3M-PS-8S | 1.504 | 1.474 | 8 | |
| 42-S3M-PS-8A | 42-S3M-PS-8S | 1.579 | 1.549 | 8 | |
| 44-S3M-PS-8A | 44-S3M-PS-8S | 1.654 | 1.624 | 8 | |
| 45-S3M-PS-8A | 45-S3M-PS-8S | 1.692 | 1.662 | 8 | |
| 48-S3M-PS-8A | 48-S3M-PS-8S | 1.805 | 1.775 | 8 | |
| 50-S3M-PS-8A | 50-S3M-PS-8S | 1.880 | 1.850 | 8 | |
| 52-S3M-PS-8A | 52-S3M-PS-8S | 1.955 | 1.925 | 8 | |
| 54-S3M-PS-8A | 54-S3M-PS-8S | 2.030 | 2.000 | 8 | |
| 56-S3M-PS-8A | 56-S3M-PS-8S | 2.105 | 2.075 | 8 | |
| 60-S3M-PS-8A | 60-S3M-PS-8S | 2.256 | 2.226 | 8 | |
| 62-S3M-PS-8A | 62-S3M-PS-8S | 2.331 | 2.301 | 8 | |
| 64-S3M-PS-8A | 64-S3M-PS-8S | 2.406 | 2.376 | 8 | |
| 66-S3M-PS-8A | 66-S3M-PS-8S | 2.481 | 2.451 | 8 | |
| 68-S3M-PS-8A | 68-S3M-PS-8S | 2.557 | 2.527 | 8 | |
| 70-S3M-PS-8A | 70-S3M-PS-8S | 2.632 | 2.602 | 8 | |
| 72-S3M-PS-8A | 72-S3M-PS-8S | 2.707 | 2.677 | 8 | |

Order Today

sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

3mm SuperTorquePD® Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|------------------|---------------------|
| 75-S3M-PS-8A | 75-S3M-PS-8S | 2.820 | 2.790 | 8 | |
| 80-S3M-PS-8A | 80-S3M-PS-8S | 3.008 | 2.978 | 8 | |
| 90-S3M-PS-8A | 90-S3M-PS-8S | 3.384 | 3.354 | 8 | |
| 100-S3M-PS-8A | 100-S3M-PS-8S | 3.760 | 3.730 | 8 | |
| 110-S3M-PS-8A | 110-S3M-PS-8S | 4.136 | 4.106 | 8 | X |
| 120-S3M-PS-8A | 120-S3M-PS-8S | 4.511 | 4.481 | 8 | X |
| 130-S3M-PS-8A | 130-S3M-PS-8S | 4.887 | 4.857 | 8 | X |
| 140-S3M-PS-8A | 140-S3M-PS-8S | 5.263 | 5.233 | 8 | X |
| 150-S3M-PS-8A | 150-S3M-PS-8S | 5.639 | 5.609 | 8 | X |
| 160-S3M-PS-8A | 160-S3M-PS-8S | 6.015 | 5.985 | 8 | X |

Order Today

sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

5mm SuperTorquePD® Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|------------------|---------------------|
| 12-S5M-PS-6A | 12-S5M-PS-6S | 0.752 | 0.714 | 6 | |
| 13-S5M-PS-6A | 13-S5M-PS-6S | 0.815 | 0.777 | 6 | |
| 14-S5M-PS-7A | 14-S5M-PS-7S | 0.877 | 0.839 | 7 | |
| 15-S5M-PS-7A | 15-S5M-PS-7S | 0.940 | 0.902 | 7 | |
| 16-S5M-PS-7A | 16-S5M-PS-7S | 1.003 | 0.965 | 7 | |
| 17-S5M-PS-7A | 17-S5M-PS-7S | 1.065 | 1.027 | 7 | |
| 18-S5M-PS-8A | 18-S5M-PS-8S | 1.128 | 1.090 | 8 | |
| 19-S5M-PS-8A | 19-S5M-PS-8S | 1.191 | 1.153 | 8 | |
| 20-S5M-PS-8A | 20-S5M-PS-8S | 1.253 | 1.215 | 8 | |
| 21-S5M-PS-8A | 21-S5M-PS-8S | 1.316 | 1.278 | 8 | |
| 22-S5M-PS-8A | 22-S5M-PS-8S | 1.379 | 1.341 | 8 | |
| 23-S5M-PS-8A | 23-S5M-PS-8S | 1.441 | 1.403 | 8 | |
| 24-S5M-PS-8A | 24-S5M-PS-8S | 1.504 | 1.466 | 8 | |
| 25-S5M-PS-8A | 25-S5M-PS-8S | 1.567 | 1.529 | 8 | |
| 26-S5M-PS-8A | 26-S5M-PS-8S | 1.629 | 1.591 | 8 | |
| 27-S5M-PS-8A | 27-S5M-PS-8S | 1.692 | 1.654 | 8 | |
| 28-S5M-PS-8A | 28-S5M-PS-8S | 1.755 | 1.717 | 8 | |
| 29-S5M-PS-8A | 29-S5M-PS-8S | 1.817 | 1.779 | 8 | |
| 30-S5M-PS-8A | 30-S5M-PS-8S | 1.880 | 1.842 | 8 | |
| 31-S5M-PS-8A | 31-S5M-PS-8S | 1.943 | 1.905 | 8 | |
| 32-S5M-PS-8A | 32-S5M-PS-8S | 2.005 | 1.967 | 8 | |
| 33-S5M-PS-8A | 33-S5M-PS-8S | 2.068 | 2.030 | 8 | |
| 34-S5M-PS-8A | 34-S5M-PS-8S | 2.131 | 2.093 | 8 | |
| 35-S5M-PS-8A | 35-S5M-PS-8S | 2.193 | 2.155 | 8 | |
| 36-S5M-PS-8A | 36-S5M-PS-8S | 2.256 | 2.218 | 8 | |
| 38-S5M-PS-8A | 38-S5M-PS-8S | 2.381 | 2.243 | 8 | |
| 40-S5M-PS-8A | 40-S5M-PS-8S | 2.507 | 2.469 | 8 | |
| 42-S5M-PS-8A | 42-S5M-PS-8S | 2.632 | 2.594 | 8 | |
| 44-S5M-PS-8A | 44-S5M-PS-8S | 2.757 | 2.719 | 8 | |
| 45-S5M-PS-8A | 45-S5M-PS-8S | 2.820 | 2.782 | 8 | |
| 46-S5M-PS-8A | 46-S5M-PS-8S | 2.883 | 2.845 | 8 | |
| 48-S5M-PS-8A | 48-S5M-PS-8S | 3.008 | 2.970 | 8 | |
| 50-S5M-PS-8A | 50-S5M-PS-8S | 3.133 | 3.095 | 8 | |
| 54-S5M-PS-8A | 54-S5M-PS-8S | 3.384 | 3.346 | 8 | |
| 56-S5M-PS-8A | 56-S5M-PS-8S | 3.509 | 3.471 | 8 | |
| 60-S5M-PS-8A | 60-S5M-PS-8S | 3.760 | 3.722 | 8 | |
| 62-S5M-PS-8A | 62-S5M-PS-8S | 3.885 | 3.847 | 8 | |
| 65-S5M-PS-8A | 65-S5M-PS-8S | 4.073 | 4.035 | 8 | X |
| 72-S5M-PS-8A | 72-S5M-PS-8S | 4.512 | 4.474 | 8 | X |
| 80-S5M-PS-8A | 80-S5M-PS-8S | 5.013 | 4.975 | 8 | X |
| 90-S5M-PS-8A | 90-S5M-PS-8S | 5.640 | 5.602 | 8 | X |
| 100-S5M-PS-8A | 100-S5M-PS-8S | 6.267 | 6.228 | 8 | X |
| 112-S5M-PS-8A | 112-S5M-PS-8S | 7.019 | 6.980 | 8 | X |
| 126-S5M-PS-8A | 126-S5M-PS-8S | 7.896 | 7.858 | 8 | X |

Order Today

sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

8mm SuperTorquePD® Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|------------------|---------------------|
| 20-S8M-PS-10A | 20-S8M-PS-10S | 2.005 | 1.951 | 10 | |
| 21-S8M-PS-10A | 21-S8M-PS-10S | 2.105 | 2.051 | 10 | |
| 22-S8M-PS-10A | 22-S8M-PS-10S | 2.206 | 2.152 | 10 | |
| 23-S8M-PS-10A | 23-S8M-PS-10S | 2.306 | 2.252 | 10 | |
| 24-S8M-PS-10A | 24-S8M-PS-10S | 2.406 | 2.352 | 10 | |
| 25-S8M-PS-10A | 25-S8M-PS-10S | 2.506 | 2.452 | 10 | |
| 26-S8M-PS-10A | 26-S8M-PS-10S | 2.607 | 2.553 | 10 | |
| 28-S8M-PS-10A | 28-S8M-PS-10S | 2.807 | 2.753 | 10 | |
| 30-S8M-PS-10A | 30-S8M-PS-10S | 3.008 | 2.954 | 10 | |
| 32-S8M-PS-10A | 32-S8M-PS-10S | 3.208 | 3.154 | 10 | |
| 34-S8M-PS-10A | 34-S8M-PS-10S | 3.409 | 3.355 | 10 | |
| 35-S8M-PS-10A | 35-S8M-PS-10S | 3.509 | 3.455 | 10 | |
| 36-S8M-PS-10A | 36-S8M-PS-10S | 3.609 | 3.555 | 10 | |
| 38-S8M-PS-10A | 38-S8M-PS-10S | 3.810 | 3.756 | 10 | |
| 40-S8M-PS-10A | 40-S8M-PS-10S | 4.010 | 3.956 | 10 | |
| 42-S8M-PS-10A | 42-S8M-PS-10S | 4.211 | 4.157 | 10 | X |
| 44-S8M-PS-10A | 44-S8M-PS-10S | 4.411 | 4.357 | 10 | X |
| 45-S8M-PS-10A | 45-S8M-PS-10S | 4.511 | 4.457 | 10 | X |
| 48-S8M-PS-8A | 48-S8M-PS-8S | 4.812 | 4.758 | 8 | X |
| 49-S8M-PS-8A | 49-S8M-PS-8S | 4.912 | 4.858 | 8 | X |
| 50-S8M-PS-8A | 50-S8M-PS-8S | 5.013 | 4.959 | 8 | X |
| 56-S8M-PS-8A | 56-S8M-PS-8S | 5.614 | 5.560 | 8 | X |
| 60-S8M-PS-8A | 60-S8M-PS-8S | 6.015 | 5.961 | 8 | X |
| 62-S8M-PS-8A | 62-S8M-PS-8S | 6.216 | 6.162 | 8 | X |
| 64-S8M-PS-8A | 64-S8M-PS-8S | 6.416 | 6.362 | 8 | X |
| 65-S8M-PS-8A | 65-S8M-PS-8S | 6.516 | 6.462 | 8 | X |
| 70-S8M-PS-8A | 70-S8M-PS-8S | 7.018 | 6.964 | 8 | X |
| 72-S8M-PS-8A | 72-S8M-PS-8S | 7.218 | 7.164 | 8 | X |
| 75-S8M-PS-8A | 75-S8M-PS-8S | 7.519 | 7.465 | 8 | X |
| 80-S8M-PS-8A | 80-S8M-PS-8S | 8.020 | 7.966 | 8 | X |

Order Today

sales@cmtco.com - (800) 355-5949

Other tooth counts and materials available upon request

8mm PolyChain®GT® Pitch Pulley Stock

| PART NUMBER Alum 6061 | PART NUMBER Steel 12L14 | Pitch Diameter | Outside Diameter | Usable Length | 72 Hour Excluded |
|--------------------------|----------------------------|-------------------|---------------------|------------------|---------------------|
| 20-S8M-PS-10A | 20-S8M-PS-10S | 2.005 | 1.942 | 10 | |
| 21-S8M-PS-10A | 21-S8M-PS-10S | 2.105 | 2.042 | 10 | |
| 22-S8M-PS-10A | 22-S8M-PS-10S | 2.206 | 2.143 | 10 | |
| 23-S8M-PS-10A | 23-S8M-PS-10S | 2.306 | 2.243 | 10 | |
| 24-S8M-PS-10A | 24-S8M-PS-10S | 2.406 | 2.343 | 10 | |
| 25-S8M-PS-10A | 25-S8M-PS-10S | 2.506 | 2.443 | 10 | |
| 26-S8M-PS-10A | 26-S8M-PS-10S | 2.607 | 2.544 | 10 | |
| 28-S8M-PS-10A | 28-S8M-PS-10S | 2.807 | 2.744 | 10 | |
| 30-S8M-PS-10A | 30-S8M-PS-10S | 3.008 | 2.945 | 10 | |
| 32-S8M-PS-10A | 32-S8M-PS-10S | 3.208 | 3.145 | 10 | |
| 34-S8M-PS-10A | 34-S8M-PS-10S | 3.409 | 3.346 | 10 | |
| 35-S8M-PS-10A | 35-S8M-PS-10S | 3.509 | 3.446 | 10 | |
| 36-S8M-PS-10A | 36-S8M-PS-10S | 3.609 | 3.546 | 10 | |
| 38-S8M-PS-10A | 38-S8M-PS-10S | 3.810 | 3.747 | 10 | |
| 40-S8M-PS-10A | 40-S8M-PS-10S | 4.010 | 3.947 | 10 | |
| 42-S8M-PS-10A | 42-S8M-PS-10S | 4.211 | 4.148 | 10 | X |
| 44-S8M-PS-10A | 44-S8M-PS-10S | 4.411 | 4.348 | 10 | X |
| 45-S8M-PS-10A | 45-S8M-PS-10S | 4.511 | 4.448 | 10 | X |
| 48-S8M-PS-8A | 48-S8M-PS-8S | 4.812 | 4.749 | 8 | X |
| 49-S8M-PS-8A | 49-S8M-PS-8S | 4.912 | 4.849 | 8 | X |
| 50-S8M-PS-8A | 50-S8M-PS-8S | 5.013 | 4.950 | 8 | X |
| 56-S8M-PS-8A | 56-S8M-PS-8S | 5.614 | 5.551 | 8 | X |
| 60-S8M-PS-8A | 60-S8M-PS-8S | 6.015 | 5.952 | 8 | X |
| 62-S8M-PS-8A | 62-S8M-PS-8S | 6.216 | 6.153 | 8 | X |
| 64-S8M-PS-8A | 64-S8M-PS-8S | 6.416 | 6.353 | 8 | X |
| 65-S8M-PS-8A | 65-S8M-PS-8S | 6.516 | 6.454 | 8 | X |
| 70-S8M-PS-8A | 70-S8M-PS-8S | 7.018 | 6.955 | 8 | X |
| 72-S8M-PS-8A | 72-S8M-PS-8S | 7.218 | 7.155 | 8 | X |
| 75-S8M-PS-8A | 75-S8M-PS-8S | 7.519 | 7.456 | 8 | X |
| 80-S8M-PS-8A | 80-S8M-PS-8S | 8.020 | 7.957 | 8 | X |

Order Today

sales@cmtco.com - (800) 355-5949


Other tooth counts and materials available upon request

Extended Product Offering

The Concentric Maxi Torque, our Patented Hub-to-Shaft Connection System offers exceptional Concentricity and High Torque Capacity for small to medium rotary drive components.

The Concentric Maxi Torque outperforms other shaft connection systems:

- Lower component runout and reusable
- Maintains both axial and rotational position
- Less space required

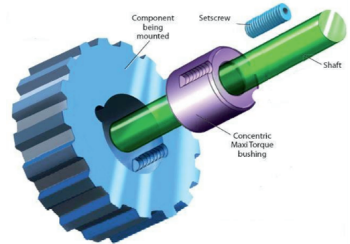

Timing Belt Pulleys

Flanges

Timing Belts

Idler Pulleys

Spur-Gears

Sprockets

Round Belt Pulleys

V-Ribbed Pulleys

Clamp Plates for Synchronous Belting

72-Hour-Pulley-Stock Program

Value Added Services

Flexible Delivery: Split, Kanban, JIT, etc.

One-Stop Source: Matching flanges and belts for pulley stock

Assembly of bushings, bearings & auxiliary parts

Laser Engraving Services

Industrial, Machined Parts, Medical, Electrical

Experts in high-tech materials such as ceramics and graphic composites

Custom Machine and Tool Co., Inc. is a Gates Industrial Belt Distributor

Members



ORDER TODAY 800-355-5949

sales@cmtco.com

www.cmtco.com

Belts
Authorized Gates Distributor





Manufacturer of Power Transmission and
Motion Control Components

Custom Machine & Tool Co., Inc.
301 Winter Street
P.O. Box 298
Hanover, MA 02339

tel (800) 355-5949
(781) 924-1003

fax (800) 355-4490
(781) 924-5154

sales@cmtco.com
www.cmtco.com

- 72-hour guaranteed shipment on 5 pieces or less*
- Any pitch and number of teeth
- Matching flanges and belts also available
- Volume purchase price breaks

*Visit www.cmtco.com/72 for Pulley Stock Program details

Precise. Reliable. Trusted.

American Engineering • American Made